

[查询"LO494TYL4-B0G-A2"供应商](#)

# Cree® 4-mm Oval LED

## Model # LO494TYL4-B0G-A2

### Data Sheet

100-degree oval LED lamp in amber color with tinted, diffused lens and stopper

#### Applications

- Variable-Message Signs
- Message Boards

#### Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ )

| Items                                    | Symbol    | Absolute Maximum Rating                                                             | Unit             |
|------------------------------------------|-----------|-------------------------------------------------------------------------------------|------------------|
| Forward Current                          | $I_F$     | 50                                                                                  | mA               |
| Peak Forward Current <small>Note</small> | $I_{FP}$  | 200                                                                                 | mA               |
| Reverse Voltage                          | $V_R$     | 5                                                                                   | V                |
| Power Dissipation                        | $P_D$     | 130                                                                                 | mW               |
| Operation Temperature                    | $T_{opr}$ | -40 ~ +95                                                                           | $^\circ\text{C}$ |
| Storage Temperature                      | $T_{stg}$ | -40 ~ +100                                                                          | $^\circ\text{C}$ |
| Lead Soldering Temperature               | $T_{sol}$ | Max. 260 $^\circ\text{C}$ for 3 sec. max.<br>(3 mm from the base of the epoxy bulb) |                  |

**Note:** Pulse width  $\leq 0.1$  msec, duty  $\leq 1/10$ .

#### Typical Electrical & Optical Characteristics ( $T_A = 25^\circ\text{C}$ )

| Characteristics     | Symbol              | Condition     | Unit | Minimum | Typical | Maximum |
|---------------------|---------------------|---------------|------|---------|---------|---------|
| Forward Voltage     | $V_F$               | $I_F = 20$ mA | V    |         | 2.3     | 2.6     |
| Reverse Current     | $I_R$               | $V_R = 5$ V   | A    |         |         | 100     |
| Dominant Wavelength | $\lambda_D$         | $I_F = 20$ mA | nm   | 584     | 591     | 596     |
| Luminous Intensity  | $I_V$               | $I_F = 20$ mA | mcd  | 390     | 700     |         |
| 50% Power Angle     | 2 $\frac{1}{2}$ H-H | $I_F = 20$ mA | deg  |         | 100     |         |
|                     | 2 $\frac{1}{2}$ V-V | $I_F = 20$ mA | deg  |         | 50      |         |

## Standard Bins for LO494TYL4-B0G-A2 ( $I_f = 20 \text{ mA}$ )

Lamps are sorted to luminous intensity ( $I_v$ ) and dominant wavelength ( $\lambda_d$ ) bins shown.

Orders for LO494TYL4-B0G-A2 may be filled with any or all bins contained as below.

All luminous intensity ( $I_v$ ) and dominant wavelength ( $\lambda_d$ ) values shown and specified are at  $I_f = 20 \text{ mA}$ .

|                              | X2                                  | X3     | X4     | X5     |            |
|------------------------------|-------------------------------------|--------|--------|--------|------------|
| Luminous Intensity ( $I_v$ ) |                                     |        |        |        | T or above |
| 1100 mcd                     |                                     |        |        |        | S          |
| 770 mcd                      |                                     |        |        |        | R          |
| 550 mcd                      |                                     |        |        |        | Q          |
| 390 mcd                      |                                     |        |        |        |            |
|                              | 584 nm                              | 587 nm | 590 nm | 593 nm | 596 nm     |
|                              | Dominant Wavelength ( $\lambda_d$ ) |        |        |        |            |

### Important Notes:

1. All ranks will be included per delivery; rank ratio will be based on the dice distribution.
2. Pb content <1000 ppm.
3. Tolerance of measurement of luminous intensity is  $\pm 15\%$ .
4. Tolerance of measurement of dominant wavelength is  $\pm 1 \text{ nm}$ .
5. Tolerance of measurement of  $V_f$  is  $\pm 0.05 \text{ V}$ .
6. Packaging methods are available for selection; please refer to the "Cree LED Lamp Packaging Standard" document.
7. Please refer to the "Cree LED Lamp Reliability Test Standards" document for reliability test conditions.
8. Please refer to the "Cree LED Lamp Soldering & Handling" document for information about how to use this LED product safely.

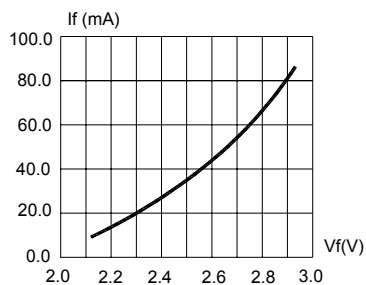


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

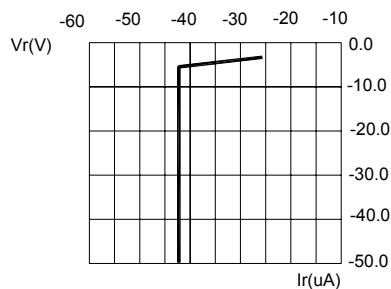


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.

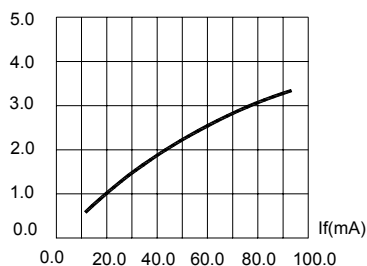


FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.

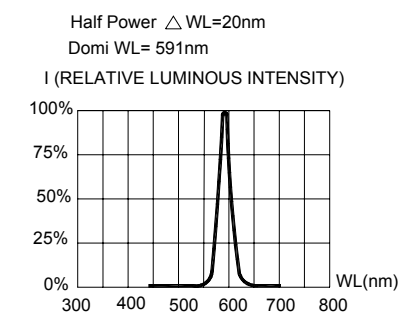


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

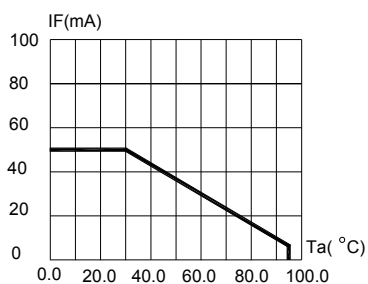


FIG.5 MAXIMUM FORWARD DC CURRENT VS. AMBIENT TEMPERATURE ( $T_{jmax}=105^{\circ}\text{C}$ )

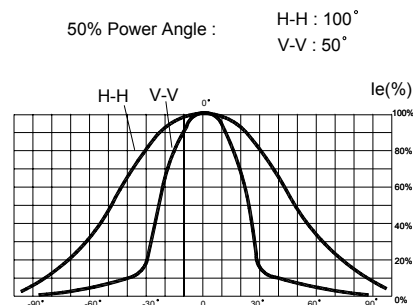



FIG.6 FAR FIELD PATTERN

## Mechanical Dimensions

All dimensions are in mm. Tolerance is  $\pm 0.25$  mm unless otherwise noted.

An epoxy meniscus may extend about 1.5 mm down the leads.

Burr around bottom of epoxy may be 0.5 mm max.

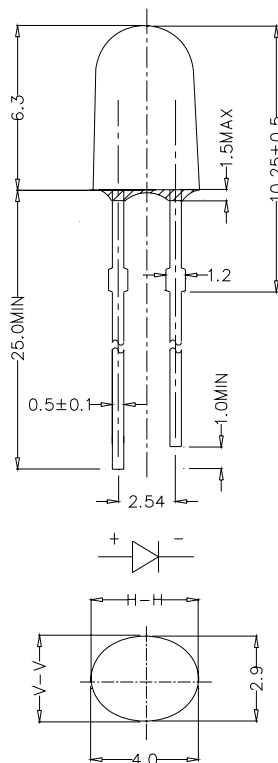

## Notes

### RoHS Compliance

The levels of environmentally sensitive, persistent biologically toxic (PBT), persistent organic pollutants (POP), or otherwise restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS), as amended through April 21, 2006.


### Vision Advisory Claim

Users should be cautioned not to stare at the light of this LED product. The bright light can damage the eye.

## Kit Number System

Cree LED lamps are tested and sorted into performance bins. A bin is specified by ranges of color, forward voltage, and brightness. Sorted LEDs are packaged for shipping in various convenient options. Please refer to the "Cree LED Lamp Packaging Standard" document for more information about shipping and packaging options.

Cree LEDs are sold by order codes in combinations of bins called kits. Order codes are configured in the following manner:

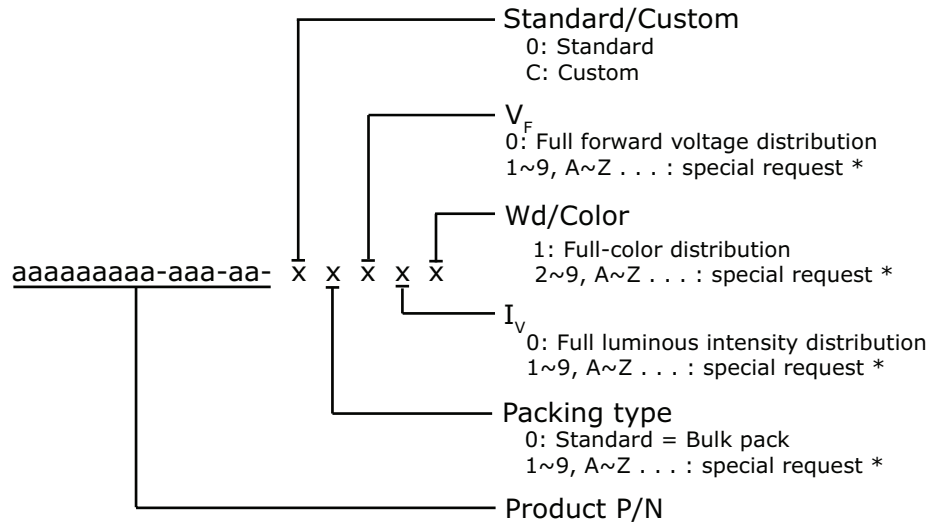

\* Contact your Cree sales representative for ordering information.

## Standard Available Kits\*

| Kit Number             | Description              |
|------------------------|--------------------------|
| LO494TYL4-B0G-A2-00001 | 4mm Oval 110 Amber 591nm |

\* Please contact your Cree representative about the availability of non-standard kits.