




**Polyester
(Mylar)
and Foil
Capacitors**

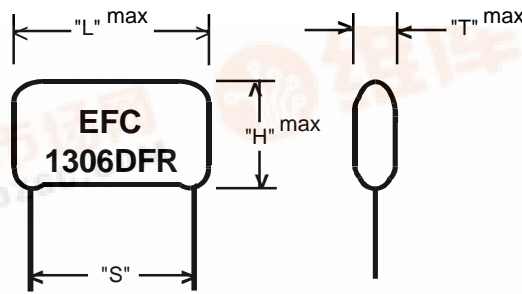

1306DFR

**Epoxy Dipped
(Radial Leads)**

Lead Specs. - Tinned Copperweld

L	S	DIA.
10.5	7.5	0.6
13.0	10.0	0.6
18.5	15.0	0.8
26.0	22.5	0.8
31.0	27.5	0.8
44.0	38.0	1.0

(All dimensions in millimeters)

DIMENSIONS and RATINGS

Cap.	1306DFR-3 100 VDC			1306DFR-3 160 VDC			1306DFR-3 250 VDC			1306DFR-3 400 VDC			1306DFR-3 630 VDC			1306DFR-3 1000 VDC		
	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L
.001	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	9.0	10.5	4.5	9.0	13.0
.0012	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	9.0	10.5	4.0	9.0	10.5	4.5	9.5	13.0
.0015	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.5	9.0	10.5	4.5	9.5	10.5	5.0	10.0	13.0
.0022	4.0	8.0	10.5	4.5	8.0	10.5	4.5	8.5	10.5	4.5	9.0	10.5	4.5	9.5	13.0	5.5	11.0	13.0
.0027	4.0	8.0	10.5	4.5	8.0	10.5	4.5	8.5	10.5	4.5	9.0	10.5	5.0	10.0	13.0	5.5	11.5	13.0
.0039	4.5	8.0	10.5	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.0	10.5	5.5	11.0	13.0	6.0	12.5	13.0
.0047	4.5	8.5	10.5	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.5	10.5	6.0	12.0	13.0	5.5	11.0	18.5
.0056	4.5	8.5	10.5	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.5	13.0	6.5	12.5	13.0	6.0	11.5	18.5
.0068	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.0	10.5	5.0	10.0	13.0	5.0	10.0	18.5	6.0	12.5	18.5
.0082	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.0	13.0	5.5	10.5	13.0	5.5	11.0	18.5	7.0	13.0	18.5
.01	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.0	13.0	5.5	11.0	13.0	6.0	12.0	18.5	7.5	14.0	18.5
.012	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.0	13.0	6.0	12.0	13.0	6.5	12.5	18.5	8.0	14.5	18.5
.015	4.5	9.0	10.5	4.5	9.0	13.0	5.0	10.0	13.0	6.5	12.5	13.0	7.0	13.0	18.5	9.0	16.5	18.5
.018	4.5	9.0	10.5	4.5	9.5	13.0	5.5	11.0	13.0	5.5	11.0	18.5	7.5	13.5	18.5	8.0	14.0	26.0
.022	4.5	9.0	10.5	5.0	10.0	13.0	6.0	12.0	13.0	6.0	12.0	18.5	8.0	14.5	18.5	8.5	15.5	26.0
.027	4.5	9.0	13.5	5.5	11.0	13.0	5.0	10.0	18.5	6.5	12.5	18.5	7.5	13.5	26.0	9.0	16.5	26.0
.033	5.0	9.5	13.0	6.0	12.5	13.0	5.5	10.5	18.5	7.5	13.5	18.5	8.5	15.5	26.0	9.5	18.0	26.0
.039	5.0	10.0	13.0	5.0	10.0	18.5	5.5	11.0	18.5	8.0	14.0	18.5	9.0	16.5	26.0	10.0	19.0	26.0
.047	5.5	11.0	13.0	5.5	10.5	18.5	6.0	12.0	18.5	8.5	15.5	18.5	9.5	18.0	26.0	10.0	19.0	31.0
.056	6.0	12.0	13.0	5.5	11.0	18.5	6.5	12.5	18.5	7.5	13.5	26.0	9.0	16.5	31.0	10.5	20.0	31.0
.068	6.5	12.5	13.0	6.0	12.0	18.5	7.0	13.0	18.5	8.0	14.0	26.0	9.5	17.0	31.0	12.0	22.0	31.0
.082	5.0	10.0	18.5	6.5	12.5	18.5	7.5	14.0	18.5	8.5	15.5	26.0	10.0	19.0	31.0	12.5	23.0	31.0
.1	5.5	11.0	18.5	7.5	13.5	18.5	8.5	15.5	18.5	9.0	16.5	26.0	10.5	20.0	31.0	15.0	27.0	31.0
.12	6.0	12.0	18.5	8.0	14.0	18.5	8.0	14.0	26.0	9.5	18.0	26.0	11.5	22.0	31.0	13.5	24.0	36.0
.15	6.5	12.5	18.5	8.5	16.0	18.5	8.5	15.5	26.0	9.5	18.0	31.0	14.0	24.0	31.0	15.0	27.0	36.0
.18	7.5	13.5	18.5	8.0	14.0	26.0	9.0	16.5	26.0	10.0	19.0	31.0	13.0	23.0	36.0	14.5	26.0	44.0
.22	8.5	15.5	18.5	8.5	15.5	26.0	9.5	18.0	26.0	11.5	20.0	31.0	15.0	26.0	36.0	16.0	28.0	44.0
.27	8.0	14.0	26.0	9.0	16.5	26.0	9.5	18.0	31.0	12.5	22.0	31.0	16.0	28.0	36.0			
.33	8.5	15.5	26.0	9.5	18.0	26.0	10.0	20.0	31.0	13.0	23.0	36.0	16.0	28.0	44.0			
.39	9.0	16.5	26.0	9.5	18.0	31.0	11.0	21.0	31.0	13.5	25.0	36.0	16.5	30.0	44.0			
.47	9.5	18.0	26.0	10.0	20.0	31.0	12.0	22.0	31.0	15.0	27.0	36.0	18.0	32.0	44.0			
.56	9.0	16.5	31.0	11.0	21.0	31.0	13.0	24.0	31.0	14.0	25.0	44.0						
.68	9.5	18.0	31.0	12.5	22.0	31.0	13.0	24.0	36.0	15.0	27.0	44.0						
.82	10.5	20.0	31.0	13.0	24.0	31.0	14.5	26.0	36.0	16.5	30.0	44.0						
1.0	12.5	24.0	31.0	15.0	26.0	31.0	14.5	26.0	44.0	18.0	32.0	44.0						

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705

Phone (203) 755-5629 * E-Mail: efc@filmcapacitors.com * FAX (203) 755-0659



This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn