


5.0mm PITCH BATTERY CONNECTOR PLUG TYPE (WITH LEFT POLARIZATION KEY)

[查询"505601MR"供应商](#)

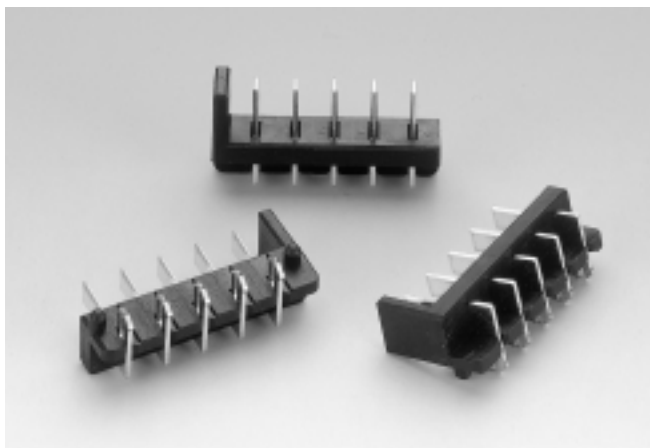


505601MR Series

Mates With **SUYIN 505602FA Series**

Specifications:

- **2-10 Circuits**
- **Insulator material** : Black High Temp . Plastic
- **Operating Temp. Range** : -40°C to +105°C
- **Terminal Material** : Brass 65/35
- **Plating** : Gold or Tin Plated
- **Max. Current Rating** : 5.0A
- **Voltage Rating** : 50V AC
- **Dielectric Strength** : 1KV (Min. 60 seconds)

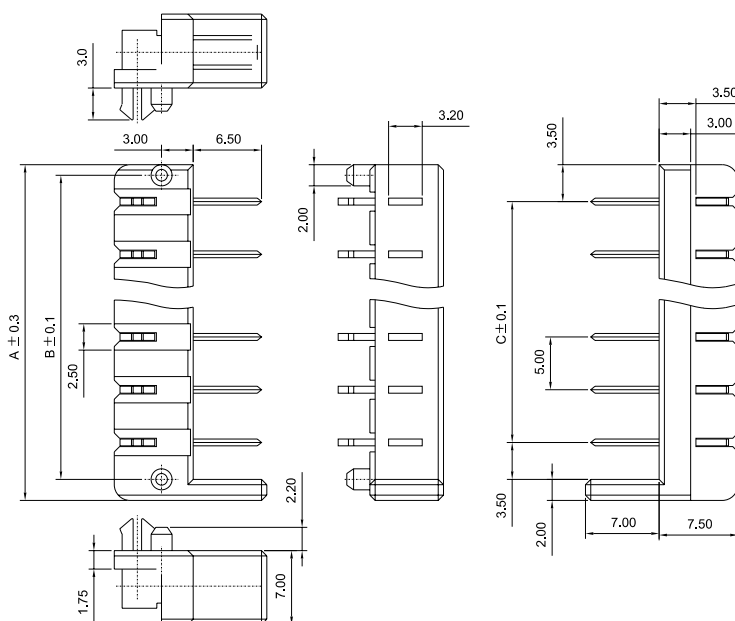

Batt

Order Information


505601MR□□□□□□ZU
1 2 3 6 4 5

1. 'R' : Right Angle Dip Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package
'U' : Tube Package Without CAP
6. Polarization Key

| SUYIN P/NO. | Polarization Key |
|-------------------|------------------|
| 505601MR□□□□□00ZU | Yes |
| 505601MR□□□□□01ZU | Without |

Reference Page 11

Recommended P.C.B. Layout

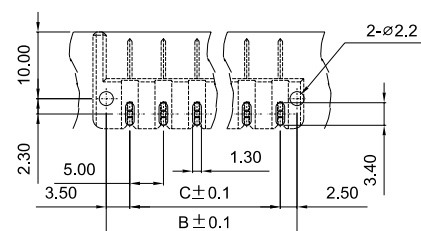

Dimensional Information

| SUYIN P/NO. | DIM.A | DIM.B | DIM.C |
|-------------------|-------|-------|-------|
| 505601MR002□□00ZU | 14.0 | 11.0 | 5.0 |
| 505601MR003□□00ZU | 19.0 | 16.0 | 10.0 |
| 505601MR004□□00ZU | 24.0 | 21.0 | 15.0 |
| 505601MR005□□00ZU | 29.0 | 26.0 | 20.0 |
| 505601MR006□□00ZU | 34.0 | 31.0 | 25.0 |
| 505601MR007□□00ZU | 39.0 | 36.0 | 30.0 |
| 505601MR008□□00ZU | 44.0 | 41.0 | 35.0 |
| 505601MR009□□00ZU | 49.0 | 46.0 | 40.0 |
| 505601MR010□□00ZU | 54.0 | 51.0 | 45.0 |