


## **Model 1469**

# Adapter – Binding Post To BNC Male, Four Terminal Isolation

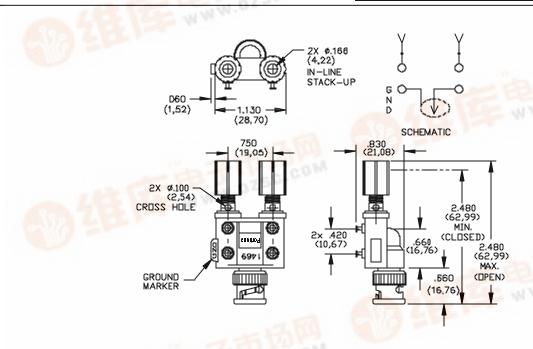

#### **FEATURES:**

- Permits single or double banana plugs to be used with equipment having BNC female
- Provides isolation for a four terminal network
- Binding posts facilitate connections of test leads or additional components
- Bright tin plated solder turret terminals provide permanent noise-free connections

### **MATERIALS:**

Upper Conn: Binding Posts, Insulated

Material: Binding Post Body – Brass per QQ-

B-626, Alloy 360, ½ Hard

Finish: Nickel plated per QQ-N-290, Class 2,

200/300 microinches

Insulation: Polycarbonate Color: One red, one black

Insulation: Polypropylene molded to binding

posts and BNC Male, Color: Black
Marking: "1469 POMONA"

Lower Conn: BNC Male

Finish: Body and Fittings – Tarnish resistant

Nominal Impedance: 50 Ohms

Center Contact – Gold plated per requirements of

MIL-C-39012

Terminals:

Material: Brass per QQ-B-626, Alloy 360, 1/2

Hard

Finish: Bright tin plated per MIL-T-10727 Type I,

100/250 microinches

#### **RATINGS:**

Operating Temperature: +55° C. (+131° F.) Max.

Operating Voltage: Hand-held Testing:

30VAC/60VDC Max. Hands Free Testing in

Controlled Voltage Environments: 500 VRMS Max.

**ORDERING INFORMATION:** Model 1469

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA



Sales: 909-469-2900 Fax: 909-629-3317 Technical Assistance: 800-241-2060