

HM5113165FTD-6

128M EDO DRAM (8-Mword $\times$ 16-bit)
4k refresh

ELPIDA

E0177H10 (Ver. 1.0)
Jul. 5, 2001

Description

The HM5113165F is 128M-bit dynamic RAM organized as 8,388,608-word $\times$ 16-bit. It has realized high performance and low power by employing CMOS process technology. HM5113165F offers Extended Data Out (EDO) Page Mode as a high speed access mode. It is packaged in 50-pin plastic TSOPII.

Features

- Single 3.3 V supply: 3.3 V $\pm$ 0.3 V
- Access time: 60 ns (max)
- Power dissipation
 - Active: 828 mW (max)
 - Standby : 3.6 mW (max) (CMOS interface)
- EDO page mode capability
- Refresh cycles
 - $\overline{\text{RAS}}$ -only refresh
4096 cycles/64 ms
 - CBR/Hidden refresh
4096 cycles/64 ms
- 4 variations of refresh
 - $\overline{\text{RAS}}$ -only refresh
 - $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh
 - Hidden refresh
- $2\overline{\text{CAS}}$ -byte control

Ordering Information


Type No.	Access time	Package
HM5113165FTD-6	60 ns	400-mil 50-pin plastic TSOP II (TTP-50DE)

Elpida Memory, Inc. is a joint venture DRAM company of NEC Corporation and Hitachi, Ltd.



HM5113165FTD-6

Pin Arrangement (HM5113165F Series)

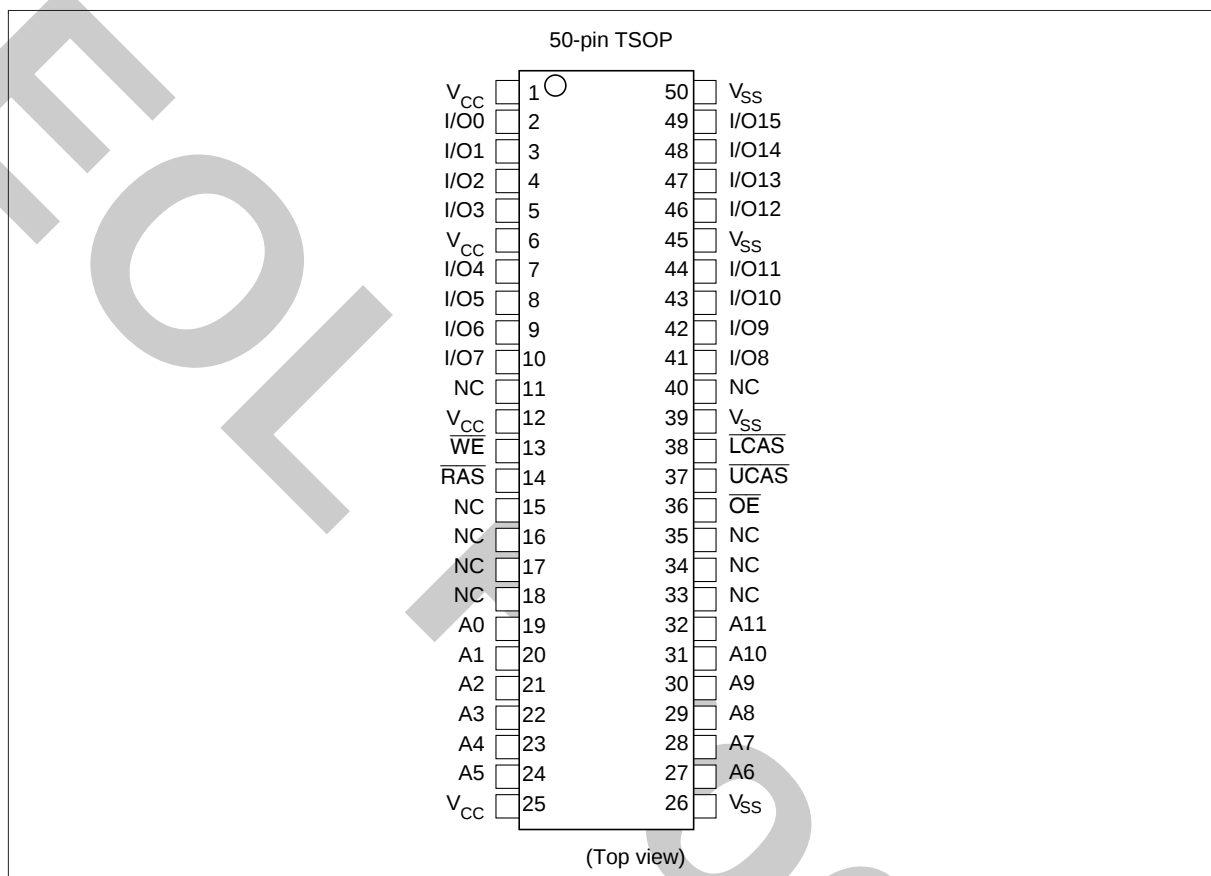


Pin Description

Pin name	Function
A0 to A11	Address input — Row/Refresh address A0 to A11 — Column address A0 to A10
I/O0 to I/O15	Data input/output
RAS	Row address strobe
UCAS, LCAS	Column address strobe
WE	Write enable
OE	Output enable
V _{CC}	Power supply
V _{SS}	Ground
NC	No connection

HM5113165FTD-6

Block Diagram

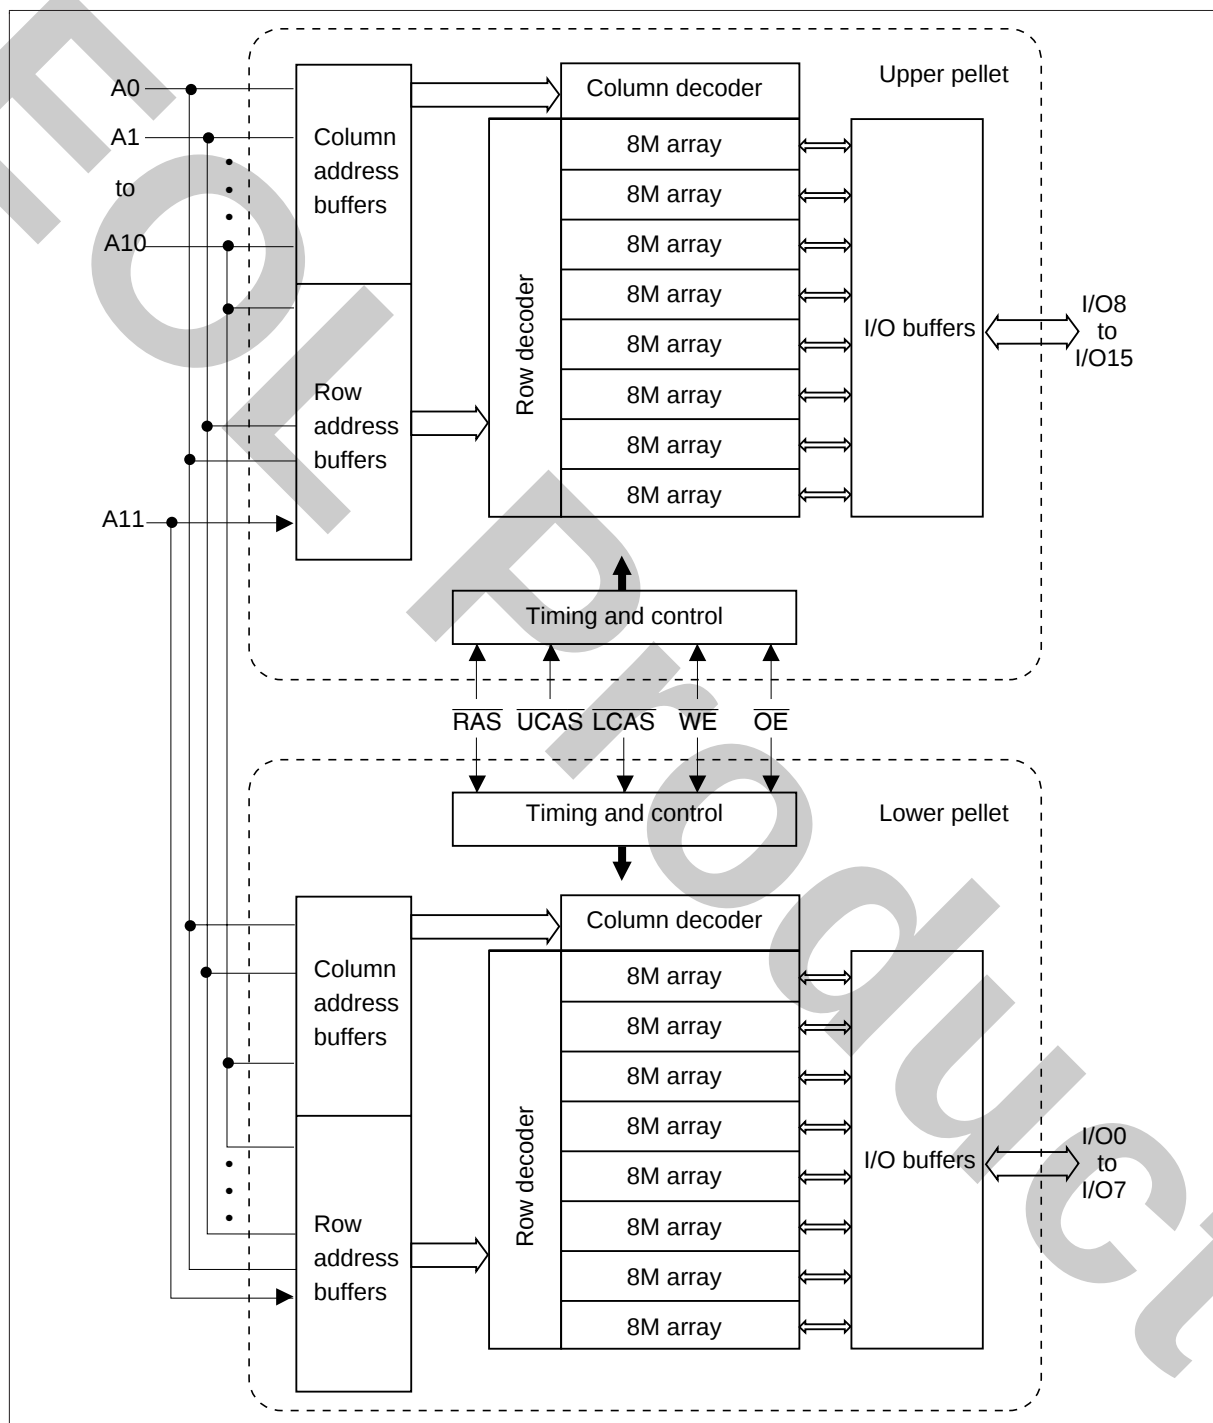

HM5113165FTD-6

Operation Table

RAS	LCAS	UCAS	WE	OE	I/O 0 to I/O 7	I/O 8 to I/O 15	Operation
H	×	×	×	×	High-Z	High-Z	Standby
L	L	H	H	L	Dout	High-Z	Read cycle
L	H	L	H	L	High-Z	Dout	
L	L	L	H	L	Dout	Dout	
L	L	H	L ^{*2}	×	Din	×	Early write cycle
L	H	L	L ^{*2}	×	×	Din	
L	L	L	L ^{*2}	×	Din	Din	
L	L	H	L ^{*2}	H	Din	×	Delayed write cycle
L	H	L	L ^{*2}	H	×	Din	
L	L	L	L ^{*2}	H	Din	Din	
L	L	H	H to L	L to H	Dout/Din	High-Z	Read-modify-write cycle
L	H	L	H to L	L to H	High-Z	Dout/Din	
L	L	L	H to L	L to H	Dout/Din	Dout/Din	
L	H	H	×	×	High-Z	High-Z	RAS-only refresh cycle
H to L	L	L	H	×	High-Z	High-Z	CAS-before-RAS refresh cycle
L	L	L	H	H	High-Z	High-Z	Read cycle (Output disabled)

- Notes: 1. H: V_{IH} (inactive) L: V_{IL} (active) ×: V_{IH} or V_{IL}
 2. $t_{WCS} \geq 0$ ns: Early write cycle
 $t_{WCS} < 0$ ns: Delayed write cycle
 3. UCAS controls the upper pellet (I/O 8 to 15) only, and LCAS controls the lower pellet (I/O 0 to 7) only. Therefore, mode, read/write and High-Z control are done independently by each UCAS, LCAS.

HM5113165FTD-6

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Terminal voltage on any pin relative to V_{SS}	V_T	-0.5 to $V_{CC} + 0.5$ (≤ 4.6 V (max))	V
Power supply voltage relative to V_{SS}	V_{CC}	-0.5 to $+4.6$	V
Short circuit output current	I_{out}	50	mA
Power dissipation	P_T	1.0	W
Storage temperature	T_{stg}	-55 to $+125$	$^{\circ}\text{C}$

DC Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Supply voltage	V_{CC}	3.0	3.3	3.6	V	1, 2
	V_{SS}	0	0	0	V	2
Input high voltage	V_{IH}	2.0	—	$V_{CC} + 0.3$	V	1
Input low voltage	V_{IL}	-0.3	—	0.8	V	1
Ambient temperature range	T_a	0	—	70	$^{\circ}\text{C}$	

Notes: 1. All voltage referred to V_{SS} .

2. The supply voltage with all V_{CC} pins must be on the same level. The supply voltage with all V_{SS} pins must be on the same level.

HM5113165FTD-6

DC Characteristics

		HM5113165F			
		-6			
Parameter	Symbol	Min	Max	Unit	Test conditions
Operating current*1, *2	I _{CC1}	—	230	mA	t _{RC} = min
Standby current	I _{CC2}	—	4	mA	TTL interface RAS, UCAS, LCAS = V _{IH} Dout = High-Z
		—	1	mA	CMOS interface RAS, UCAS, LCAS ≥ V _{CC} − 0.2 V Dout = High-Z
RAS-only refresh current*2	I _{CC3}	—	230	mA	t _{RC} = min
Standby current*1	I _{CC5}	—	10	mA	RAS = V _{IH} UCAS, LCAS = V _{IL} Dout = enable
CAS-before-RAS refresh current	I _{CC6}	—	230	mA	t _{RC} = min
EDO page mode current*1, *3	I _{CC7}	—	200	mA	RAS = V _{IL} , CAS cycle, t _{HPC} = t _{HPC} min
Input leakage current	I _{LI}	−5	5	μA	0 V ≤ Vin ≤ V _{CC} + 0.3 V
Output leakage current	I _{LO}	−5	5	μA	0 V ≤ Vout ≤ V _{CC} Dout = disable
Output high voltage	V _{OH}	2.4	V _{CC}	V	High Iout = −2 mA
Output low voltage	V _{OL}	0	0.4	V	Low Iout = 2 mA

Notes: 1. I_{CC} depends on output load condition when the device is selected. I_{CC} max is specified at the output open condition.

2. Address can be changed once or less while $\overline{RAS} = V_{IL}$.

3. Measured with one sequential address change per EDO cycle, t_{HPC} .

4. $V_{IH} \geq V_{CC} - 0.2 V$, $0 V \leq V_{IL} \leq 0.2 V$.

Capacitance ($T_a = 25^\circ C$, $V_{CC} = 3.3 V \pm 0.3 V$)

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Input capacitance (Address)	C_{I1}	—	—	7	pF	1
Input capacitance (Clocks)	C_{I2}	—	—	7	pF	1
Output capacitance (Data-in, Data-out)	C_{IO}	—	—	7	pF	1, 2

Notes : 1. Capacitance measured with Boonton Meter or effective capacitance measuring method.

2. $\overline{RAS}, \overline{UCAS}$ and $\overline{LCAS} = V_{IH}$ to disable Dout.

HM5113165FTD-6

AC Characteristics ($T_a = 0$ to $+70^\circ\text{C}$, $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$, $V_{SS} = 0\text{ V}$) *¹, *², *¹⁹

Test Conditions

- Input rise and fall time: 2 ns
- Input pulse levels: $V_{IL} = 0\text{ V}$, $V_{IH} = 3.0\text{ V}$
- Input timing reference levels: 0.8 V, 2.0 V
- Output timing reference levels: 0.8 V, 2.0 V
- Output load: 1 TTL gate + C_L (100 pF) (Including scope and jig)

Read, Write, Read-Modify-Write and Refresh Cycles (Common parameters)

HM5113165F					
-6					
Parameter	Symbol	Min	Max	Unit	Notes
Random read or write cycle time	t_{RC}	104	—	ns	
$\overline{\text{RAS}}$ precharge time	t_{RP}	40	—	ns	
$\overline{\text{CAS}}$ precharge time	t_{CP}	10	—	ns	23
$\overline{\text{RAS}}$ pulse width	t_{RAS}	60	10000	ns	
$\overline{\text{CAS}}$ pulse width	t_{CAS}	10	10000	ns	
Row address setup time	t_{ASR}	0	—	ns	
Row address hold time	t_{RAH}	10	—	ns	
Column address setup time	t_{ASC}	0	—	ns	23
Column address hold time	t_{CAH}	10	—	ns	23
$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ delay time	t_{RCD}	14	45	ns	3
$\overline{\text{RAS}}$ to column address delay time	t_{RAD}	12	30	ns	4
$\overline{\text{RAS}}$ hold time	t_{RSH}	15	—	ns	
$\overline{\text{CAS}}$ hold time	t_{CSH}	40	—	ns	
$\overline{\text{CAS}}$ to $\overline{\text{RAS}}$ precharge time	t_{CRP}	5	—	ns	23
$\overline{\text{OE}}$ to Din delay time	t_{OED}	15	—	ns	5
$\overline{\text{OE}}$ delay time from Din	t_{DZO}	0	—	ns	6
$\overline{\text{CAS}}$ delay time from Din	t_{DZC}	0	—	ns	6
Transition time (rise and fall)	t_T	2	50	ns	7

HM5113165FTD-6

Read Cycle

Parameter	Symbol	HM5113165F		Unit	Notes
		-6			
		Min	Max		
Access time from $\overline{\text{RAS}}$	t_{RAC}	—	60	ns	8, 9
Access time from $\overline{\text{CAS}}$	t_{CAC}	—	15	ns	9, 10, 17
Access time from address	t_{AA}	—	30	ns	9, 11, 17
Access time from $\overline{\text{OE}}$	t_{OEA}	—	15	ns	9
Read command setup time	t_{RCS}	0	—	ns	23
Read command hold time to $\overline{\text{CAS}}$	t_{RCH}	0	—	ns	12, 23
Read command hold time from $\overline{\text{RAS}}$	t_{RCHR}	60	—	ns	
Read command hold time to $\overline{\text{RAS}}$	t_{RRH}	0	—	ns	12
Column address to $\overline{\text{RAS}}$ lead time	t_{RAL}	30	—	ns	
Column address to $\overline{\text{CAS}}$ lead time	t_{CAL}	18	—	ns	
$\overline{\text{CAS}}$ to output in low-Z	t_{CLZ}	0	—	ns	
Output data hold time	t_{OH}	3	—	ns	21
Output data hold time from $\overline{\text{OE}}$	t_{OHO}	3	—	ns	
Output buffer turn-off time	t_{OFF}	—	15	ns	13, 21
Output buffer turn-off to $\overline{\text{OE}}$	t_{OEZ}	—	15	ns	13
$\overline{\text{CAS}}$ to Din delay time	t_{CDD}	15	—	ns	5
Output data hold time from $\overline{\text{RAS}}$	t_{OHR}	3	—	ns	21
Output buffer turn-off to $\overline{\text{RAS}}$	t_{OFR}	—	15	ns	13, 21
Output buffer turn-off to $\overline{\text{WE}}$	t_{WEZ}	—	15	ns	13
$\overline{\text{WE}}$ to Din delay time	t_{WED}	15	—	ns	
$\overline{\text{RAS}}$ to Din delay time	t_{RDD}	15	—	ns	

HM5113165FTD-6

Write Cycle

HM5113165F					
-6					
Parameter	Symbol	Min	Max	Unit	Notes
Write command setup time	t_{WCS}	0	—	ns	14, 23
Write command hold time	t_{WCH}	10	—	ns	23
Write command pulse width	t_{WCP}	10	—	ns	
Write command to $\overline{RAS}$ lead time	t_{RWL}	15	—	ns	
Write command to $\overline{CAS}$ lead time	t_{CWL}	10	—	ns	23
Data-in setup time	t_{DS}	0	—	ns	15, 23
Data-in hold time	t_{DH}	10	—	ns	15, 23

Read-Modify-Write Cycle

HM5113165F					
-6					
Parameter	Symbol	Min	Max	Unit	Notes
Read-modify-write cycle time	t_{RWC}	140	—	ns	
$\overline{RAS}$ to $\overline{WE}$ delay time	t_{RWD}	79	—	ns	14
$\overline{CAS}$ to $\overline{WE}$ delay time	t_{CWD}	34	—	ns	14
Column address to $\overline{WE}$ delay time	t_{AWD}	49	—	ns	14
$\overline{OE}$ hold time from $\overline{WE}$	t_{OEHL}	15	—	ns	

Refresh Cycle

HM5113165F					
-6					
Parameter	Symbol	Min	Max	Unit	Notes
$\overline{CAS}$ setup time (CBR refresh cycle)	t_{CSR}	5	—	ns	23
$\overline{CAS}$ hold time (CBR refresh cycle)	t_{CHR}	10	—	ns	23
$\overline{WE}$ setup time (CBR refresh cycle)	t_{WRP}	0	—	ns	
$\overline{WE}$ hold time (CBR refresh cycle)	t_{WRH}	10	—	ns	
$\overline{RAS}$ precharge to $\overline{CAS}$ hold time	t_{RPC}	5	—	ns	23

HM5113165FTD-6

EDO Page Mode Cycle

		HM5113165F			
		-6			
Parameter	Symbol	Min	Max	Unit	Notes
EDO page mode cycle time	t _{HPC}	25	—	ns	20
EDO page mode $\overline{\text{RAS}}$ pulse width	t _{RASP}	—	100000	ns	16
Access time from $\overline{\text{CAS}}$ precharge	t _{CPA}	—	35	ns	9, 17, 23
$\overline{\text{RAS}}$ hold time from $\overline{\text{CAS}}$ precharge	t _{CPRH}	35	—	ns	
Output data hold time from $\overline{\text{CAS}}$ low	t _{DOH}	3	—	ns	9, 22
$\overline{\text{CAS}}$ hold time referred $\overline{\text{OE}}$	t _{COL}	10	—	ns	
$\overline{\text{CAS}}$ to $\overline{\text{OE}}$ setup time	t _{COP}	5	—	ns	
Read command hold time from $\overline{\text{CAS}}$ precharge	t _{RCHC}	35	—	ns	
Write pulse width during $\overline{\text{CAS}}$ precharge	t _{WPE}	10	—	ns	
$\overline{\text{OE}}$ precharge time	t _{OEP}	10	—	ns	

EDO Page Mode Read-Modify-Write Cycle

HM5113165F					
-6					
Parameter	Symbol	Min	Max	Unit	Notes
EDO page mode read-modify-write cycle time	t _{HPRWC}	68	—	ns	
$\overline{WE}$ delay time from $\overline{CAS}$ precharge	t _{CPW}	54	—	ns	14, 23

Refresh

Parameter	Symbol	Max	Unit	Notes
Refresh period	t_{REF}	64	ms	4096 cycles

- Notes: 1. AC measurements assume $t_T = 2$ ns.
2. An initial pause of 200 μ s is required after power up followed by a minimum of eight initialization cycles (any combination of cycles containing $\overline{RAS}$ -only refresh or $\overline{CAS}$ -before- $\overline{RAS}$ refresh).
3. Operation with the t_{RCD} (max) limit insures that t_{RAC} (max) can be met, t_{RCD} (max) is specified as a reference point only; if t_{RCD} is greater than the specified t_{RCD} (max) limit, than the access time is controlled exclusively by t_{CAC} .


HM5113165FTD-6

4. Operation with the t_{RAD} (max) limit insures that t_{RAC} (max) can be met, t_{RAD} (max) is specified as a reference point only; if t_{RAD} is greater than the specified t_{RAD} (max) limit, then access time is controlled exclusively by t_{AA} .
5. Either t_{OED} or t_{CDD} must be satisfied.
6. Either t_{DZO} or t_{DZC} must be satisfied.
7. V_{IH} (min) and V_{IL} (max) are reference levels for measuring timing of input signals. Also, transition times are measured between V_{IH} (min) and V_{IL} (max).
8. Assumes that $t_{RCD} \leq t_{RCD}$ (max) and $t_{RAD} \leq t_{RAD}$ (max). If t_{RCD} or t_{RAD} is greater than the maximum recommended value shown in this table, t_{RAC} exceeds the value shown.
9. Measured with a load circuit equivalent to 1 TTL loads and 100 pF.
10. Assumes that $t_{RCD} \geq t_{RCD}$ (max) and $t_{RCD} + t_{CAC}$ (max) $\geq t_{RAD} + t_{AA}$ (max).
11. Assumes that $t_{RAD} \geq t_{RAD}$ (max) and $t_{RCD} + t_{CAC}$ (max) $\leq t_{RAD} + t_{AA}$ (max).
12. Either t_{RCH} or t_{RRH} must be satisfied for a read cycles.
13. t_{OFF} (max), t_{OEZ} (max), t_{WEZ} (max) and t_{OFR} (max) define the time at which the outputs achieve the open circuit condition and are not referred to output voltage levels.
14. t_{WCS} , t_{RWD} , t_{CWD} , t_{AWD} and t_{CPW} are not restrictive operating parameters. They are included in the data sheet as electrical characteristics only; if $t_{WCS} \geq t_{WCS}$ (min), the cycle is an early write cycle and the data out pin will remain open circuit (high impedance) throughout the entire cycle; if $t_{RWD} \geq t_{RWD}$ (min), $t_{CWD} \geq t_{CWD}$ (min), and $t_{AWD} \geq t_{AWD}$ (min), or $t_{CWD} \geq t_{CWD}$ (min), $t_{AWD} \geq t_{AWD}$ (min) and $t_{CPW} \geq t_{CPW}$ (min), the cycle is a read-modify-write and the data output will contain data read from the selected cell; if neither of the above sets of conditions is satisfied, the condition of the data out (at access time) is indeterminate.
15. t_{DS} and t_{DH} are referred to $\overline{UCAS}$ and $\overline{LCAS}$ leading edge in early write cycles and to $\overline{WE}$ leading edge in delayed write or read-modify-write cycles.
16. t_{RASP} defines $\overline{RAS}$ pulse width in EDO page mode cycles.
17. Access time is determined by the longest among t_{AA} , t_{CAC} and t_{CPA} .
18. In delayed write or read-modify-write cycles, $\overline{OE}$ must disable output buffer prior to applying data to the device.
19. When output buffers are enabled once, sustain the low impedance state until valid data is obtained. When output buffer is turned on and off within a very short time, generally it causes large V_{CC}/V_{SS} line noise, which causes to degrade V_{IH} min/ V_{IL} max level.
20. t_{HPC} (min) can be achieved during a series of EDO page mode write cycles or EDO page mode read cycles. If both write and read operation are mixed in a EDO page mode $\overline{RAS}$ cycle (EDO page mode mix cycle (1), (2)), minimum value of $\overline{CAS}$ cycle ($t_{CAS} + t_{CP} + 2 t_T$) becomes greater than the specified t_{HPC} (min) value. The value of $\overline{CAS}$ cycle time of mixed EDO page mode is shown in EDO page mode mix cycle (1) and (2).
21. Data output turns off and becomes high impedance from later rising edge of $\overline{RAS}$ and $\overline{CAS}$. Hold time and turn off time are specified by the timing specifications of later rising edge of $\overline{RAS}$ and $\overline{CAS}$ between t_{OHR} and t_{OH} and between t_{OFR} and t_{OFF} .
22. t_{DOH} defines the time at which the output level go cross. $V_{OL} = 0.8 V$, $V_{OH} = 2.0 V$ of output timing reference level.
23. t_{ASC} , t_{CAH} , t_{RCS} , t_{WCS} , t_{WCH} , t_{CSR} , t_{RPC} , t_{CRP} , t_{CHR} , t_{RCH} , t_{CPA} , t_{CPW} , t_{CWL} , t_{DH} , t_{DS} , t_{CHS} and t_{CP} are determined by each of $\overline{UCAS}$ / $\overline{LCAS}$ independently.
24. XXX: H or L (H: V_{IH} (min) $\leq V_{IN} \leq V_{IH}$ (max), L: V_{IL} (min) $\leq V_{IN} \leq V_{IL}$ (max))
 //: Invalid Dout
 When the address, clock and input pins are not described on timing waveforms, their pins must be applied V_{IH} or V_{IL} .

HM5113165FTD-6


Timing Waveforms*²⁴

Read Cycle

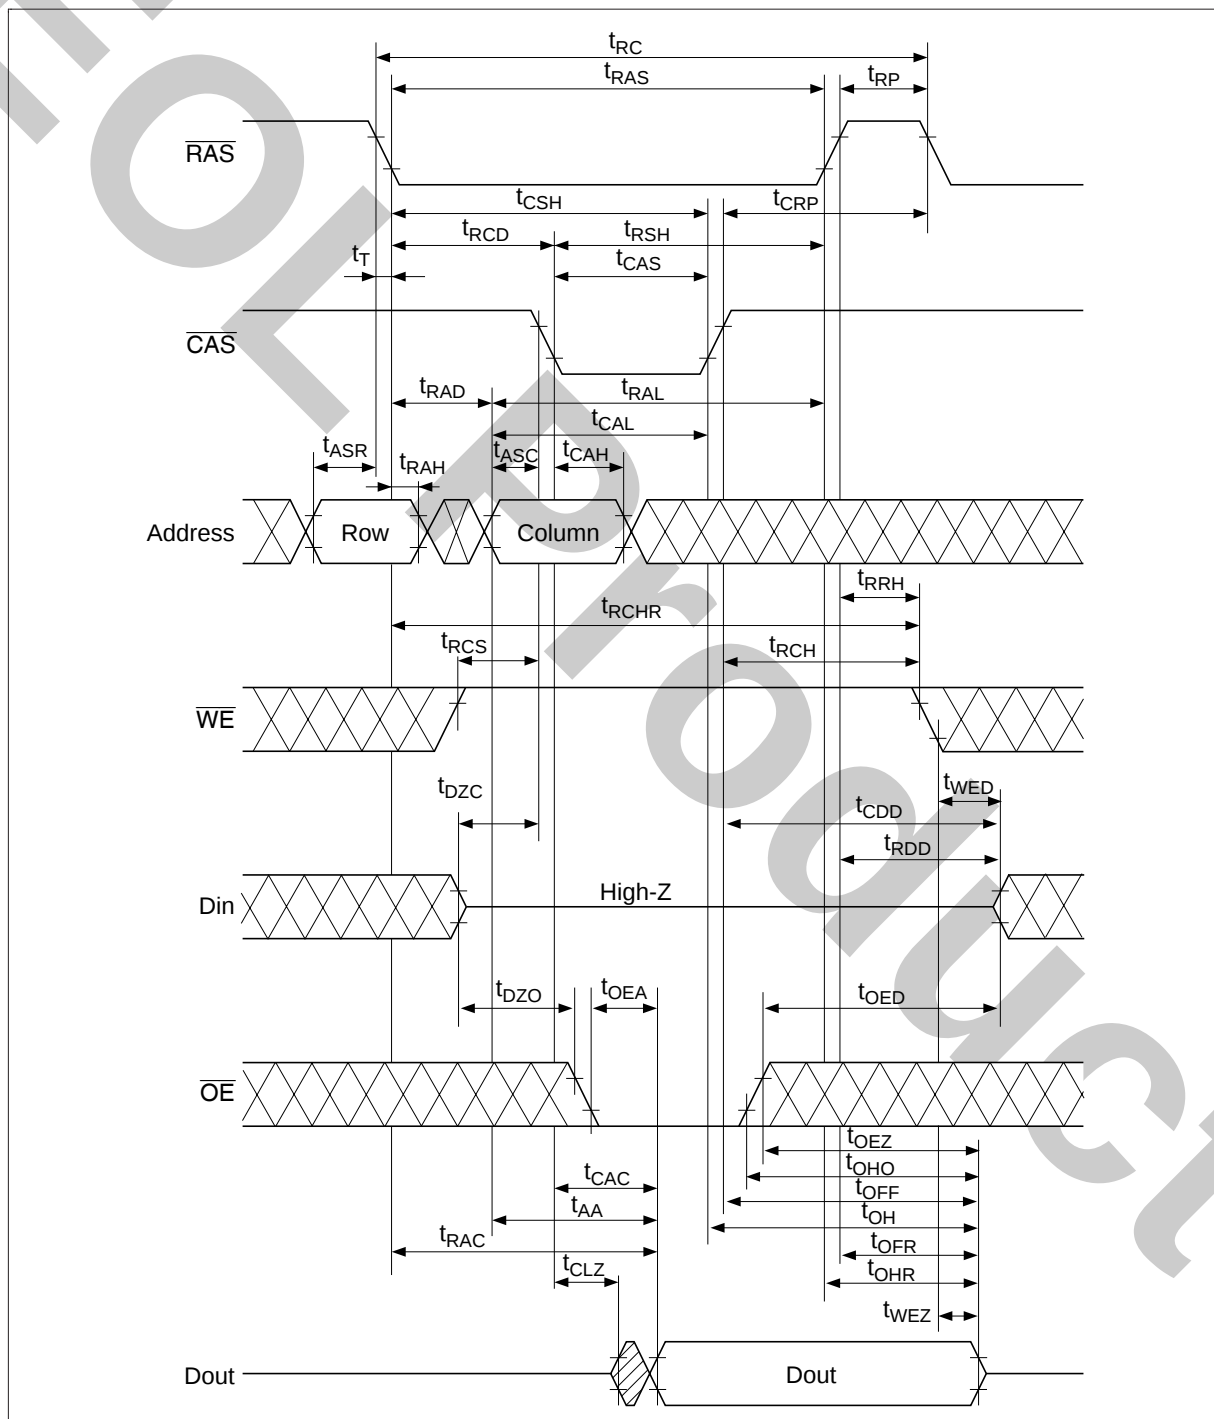


HM5113165FTD-6

Early Write Cycle

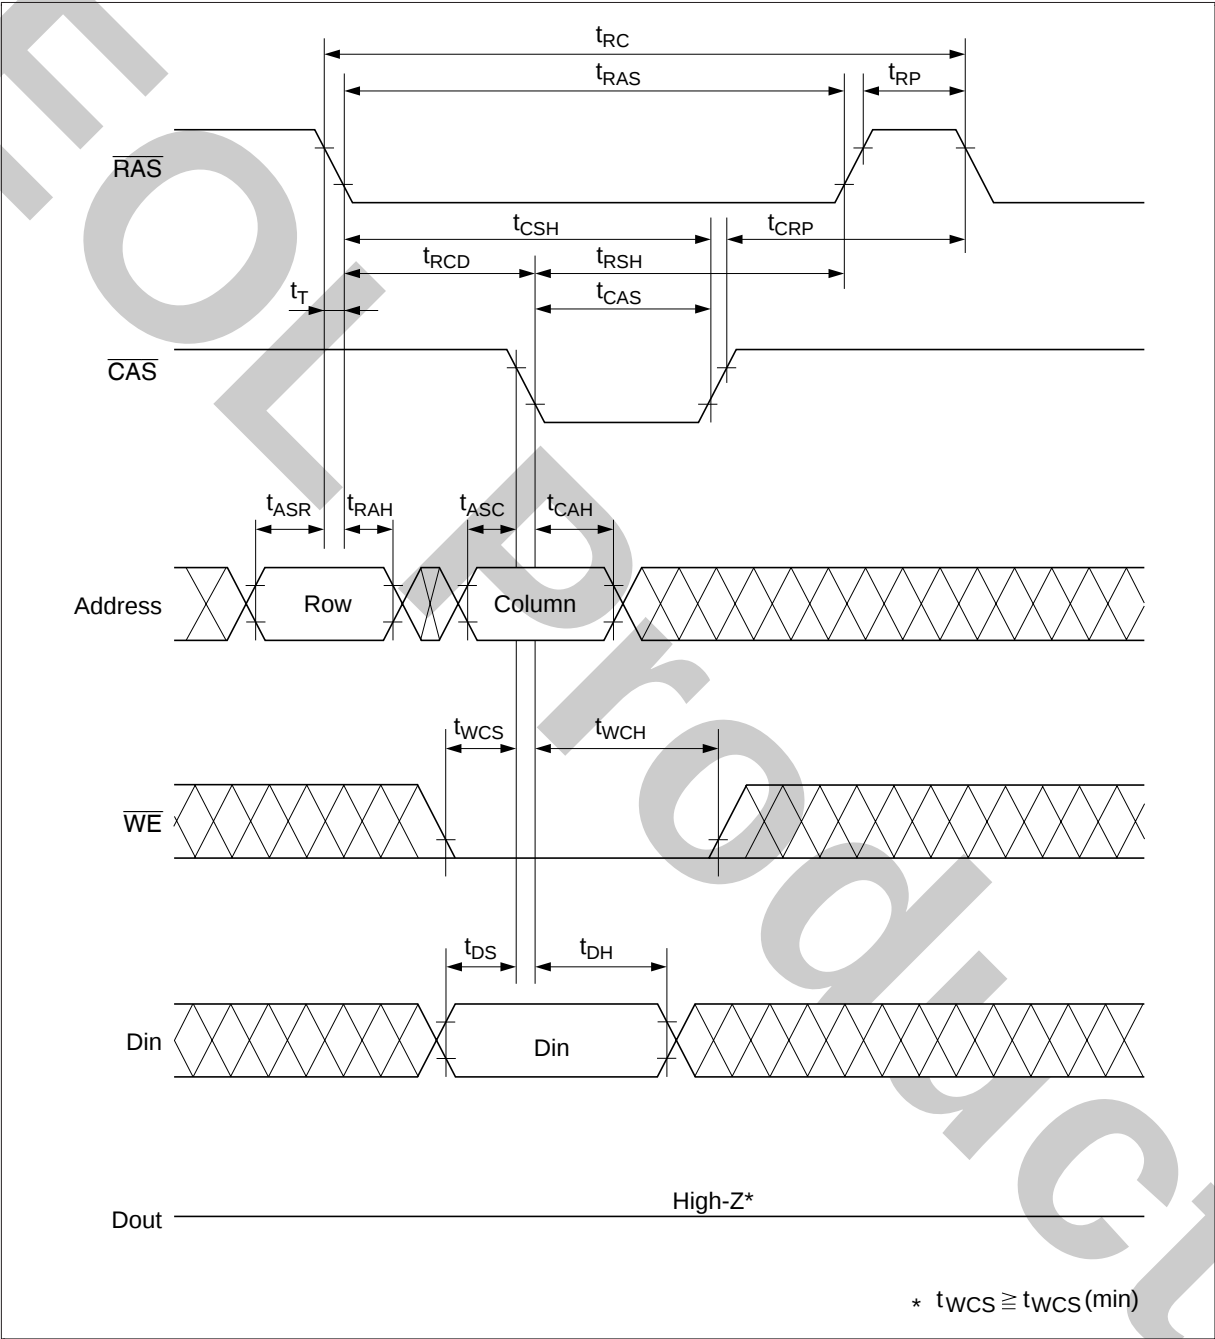


HM5113165FTD-6

Delayed Write Cycle*¹⁸

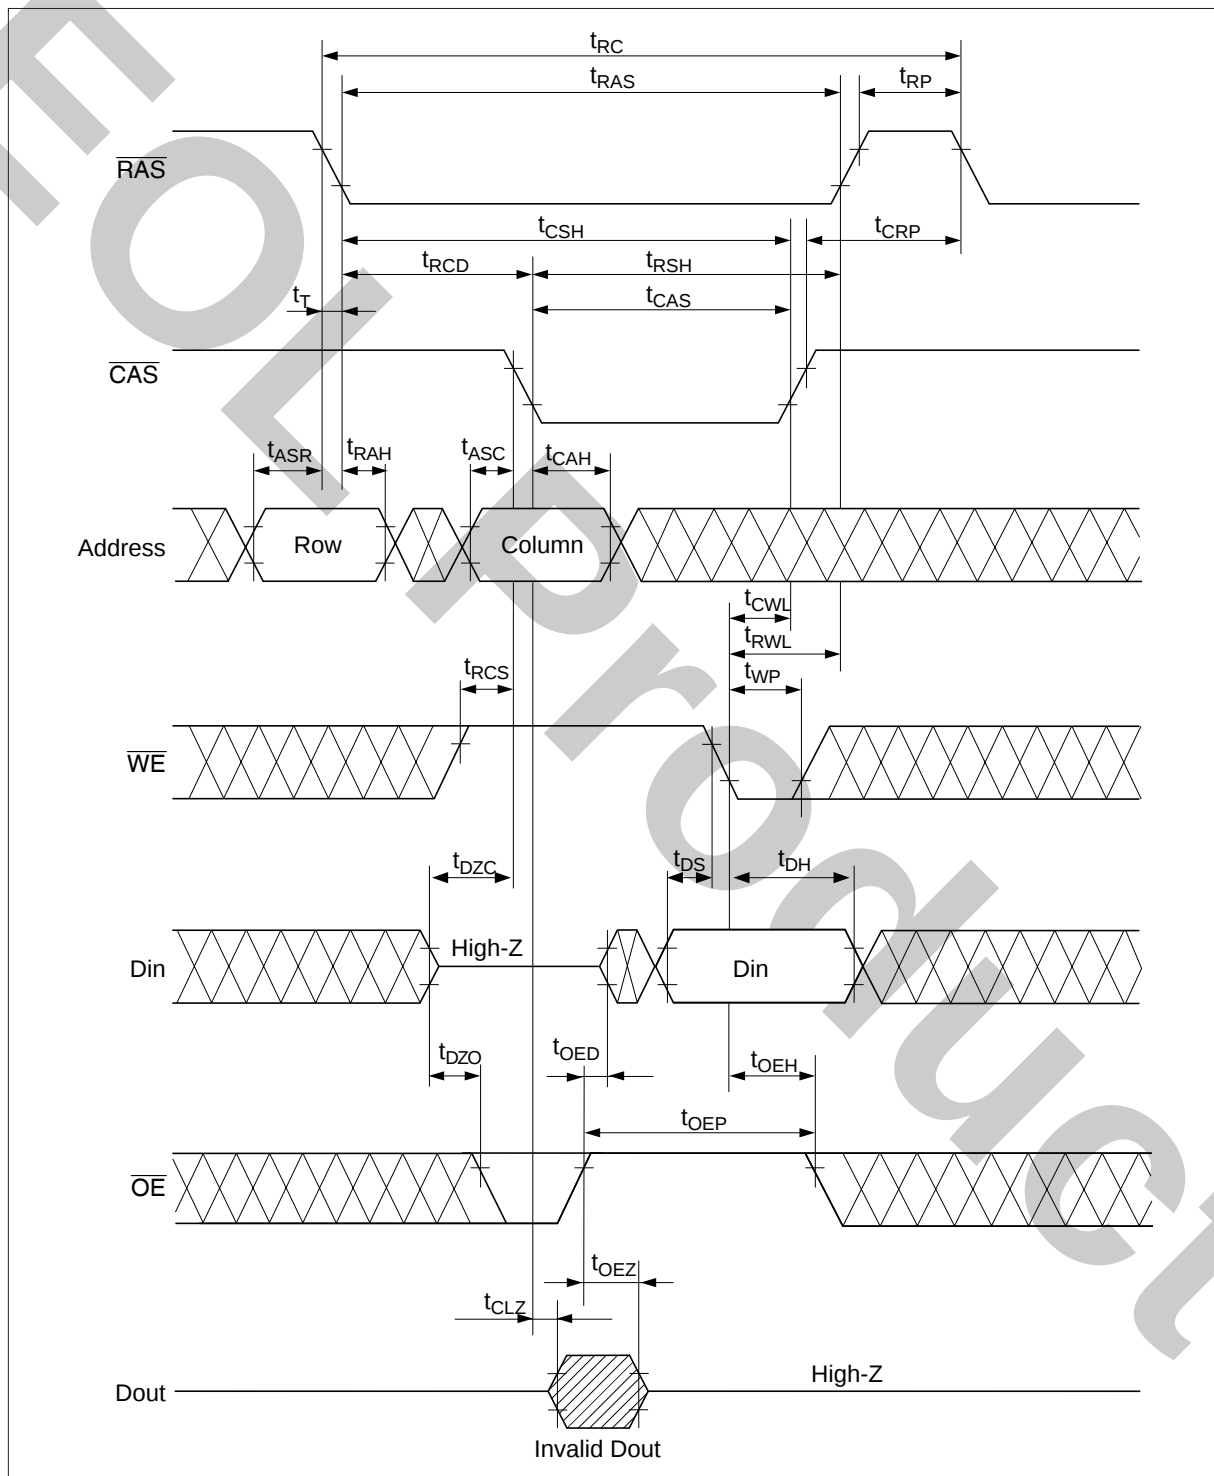


HM5113165FTD-6

Read-Modify-Write Cycle*18

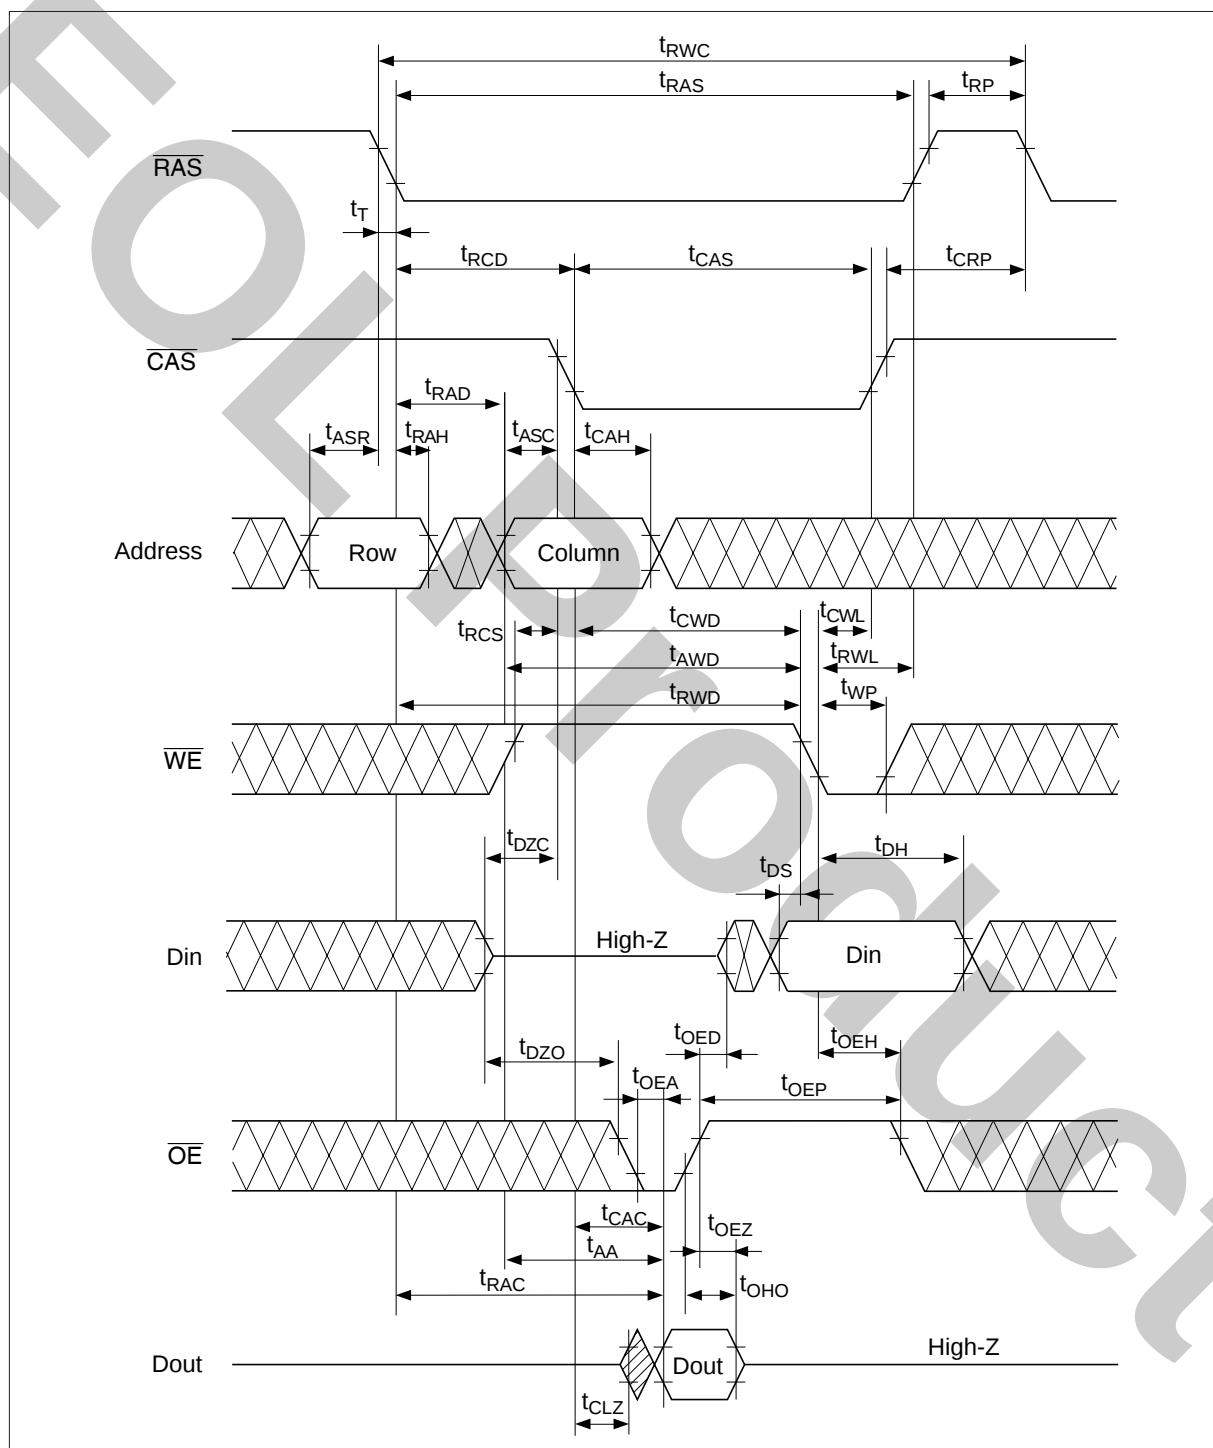


HM5113165FTD-6

$\overline{\text{RAS}}$ -Only Refresh Cycle

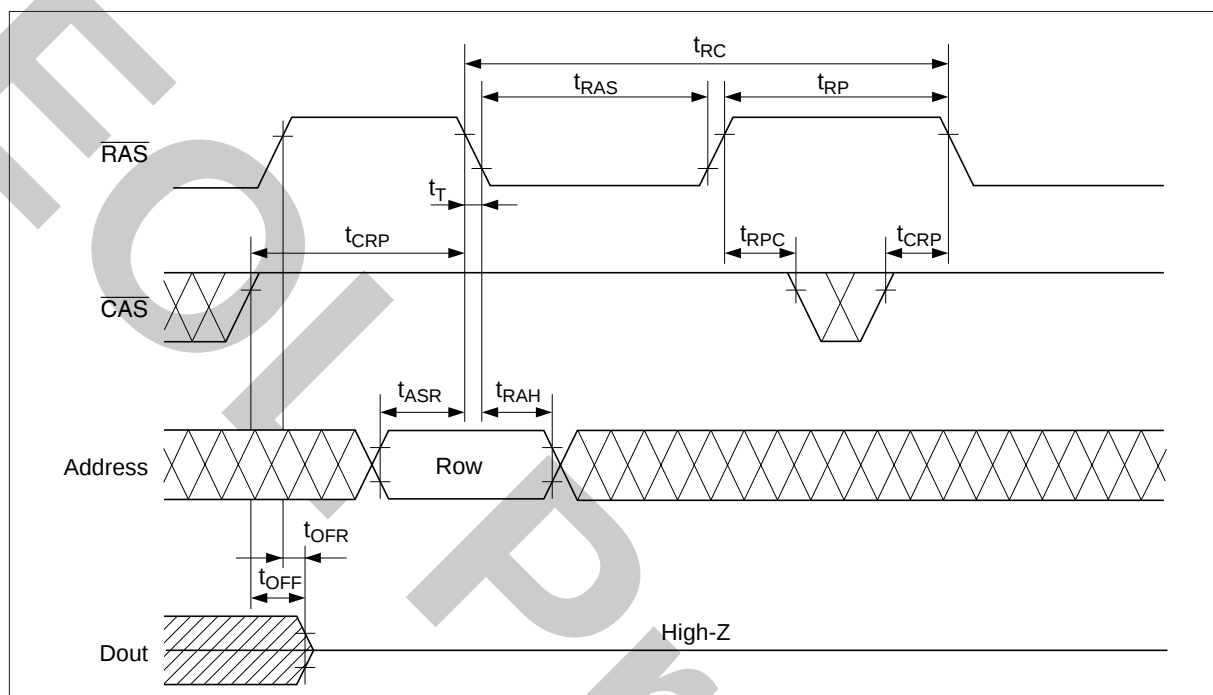


HM5113165FTD-6

$\overline{\text{CAS}}$ -Before- $\overline{\text{RAS}}$ Refresh Cycle

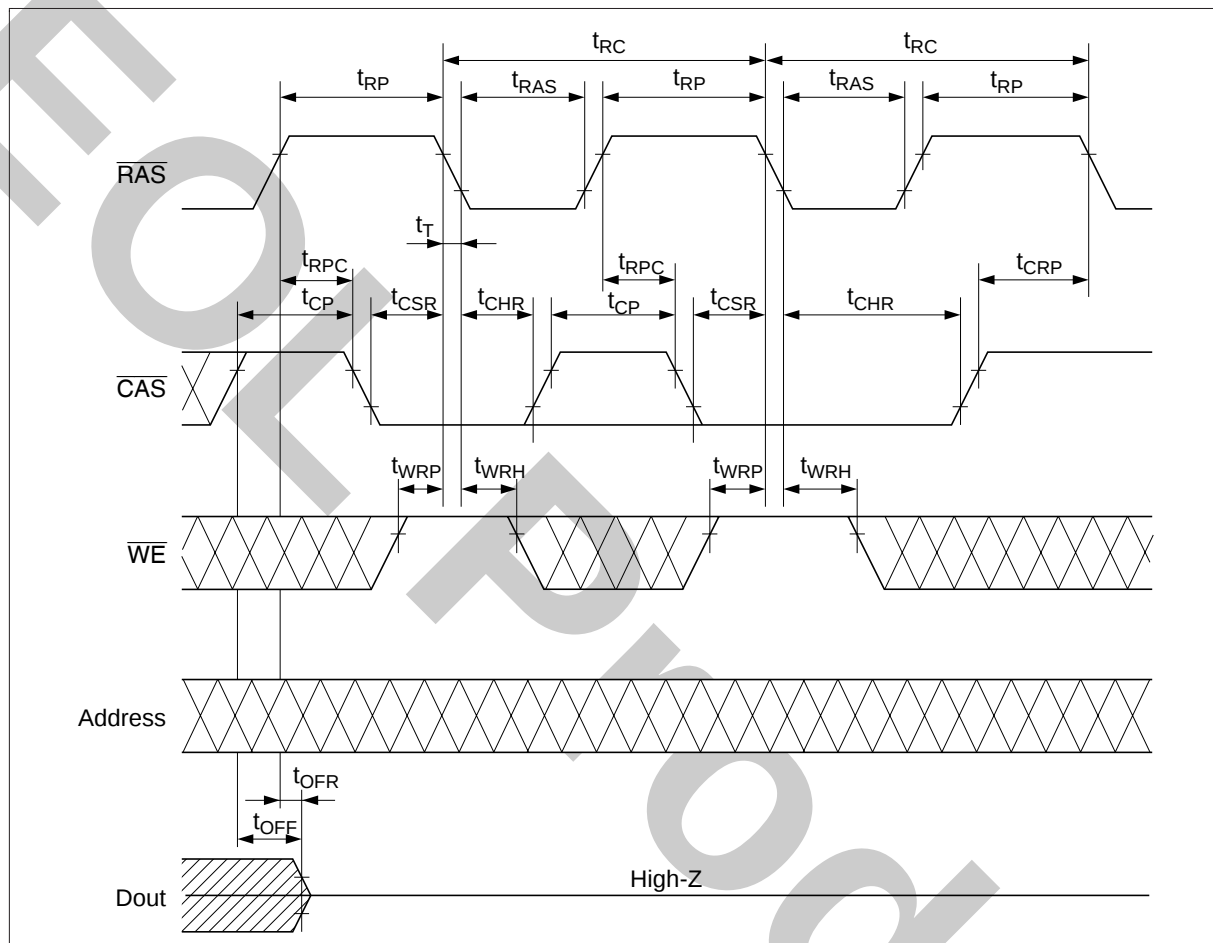


HM5113165FTD-6

Hidden Refresh Cycle

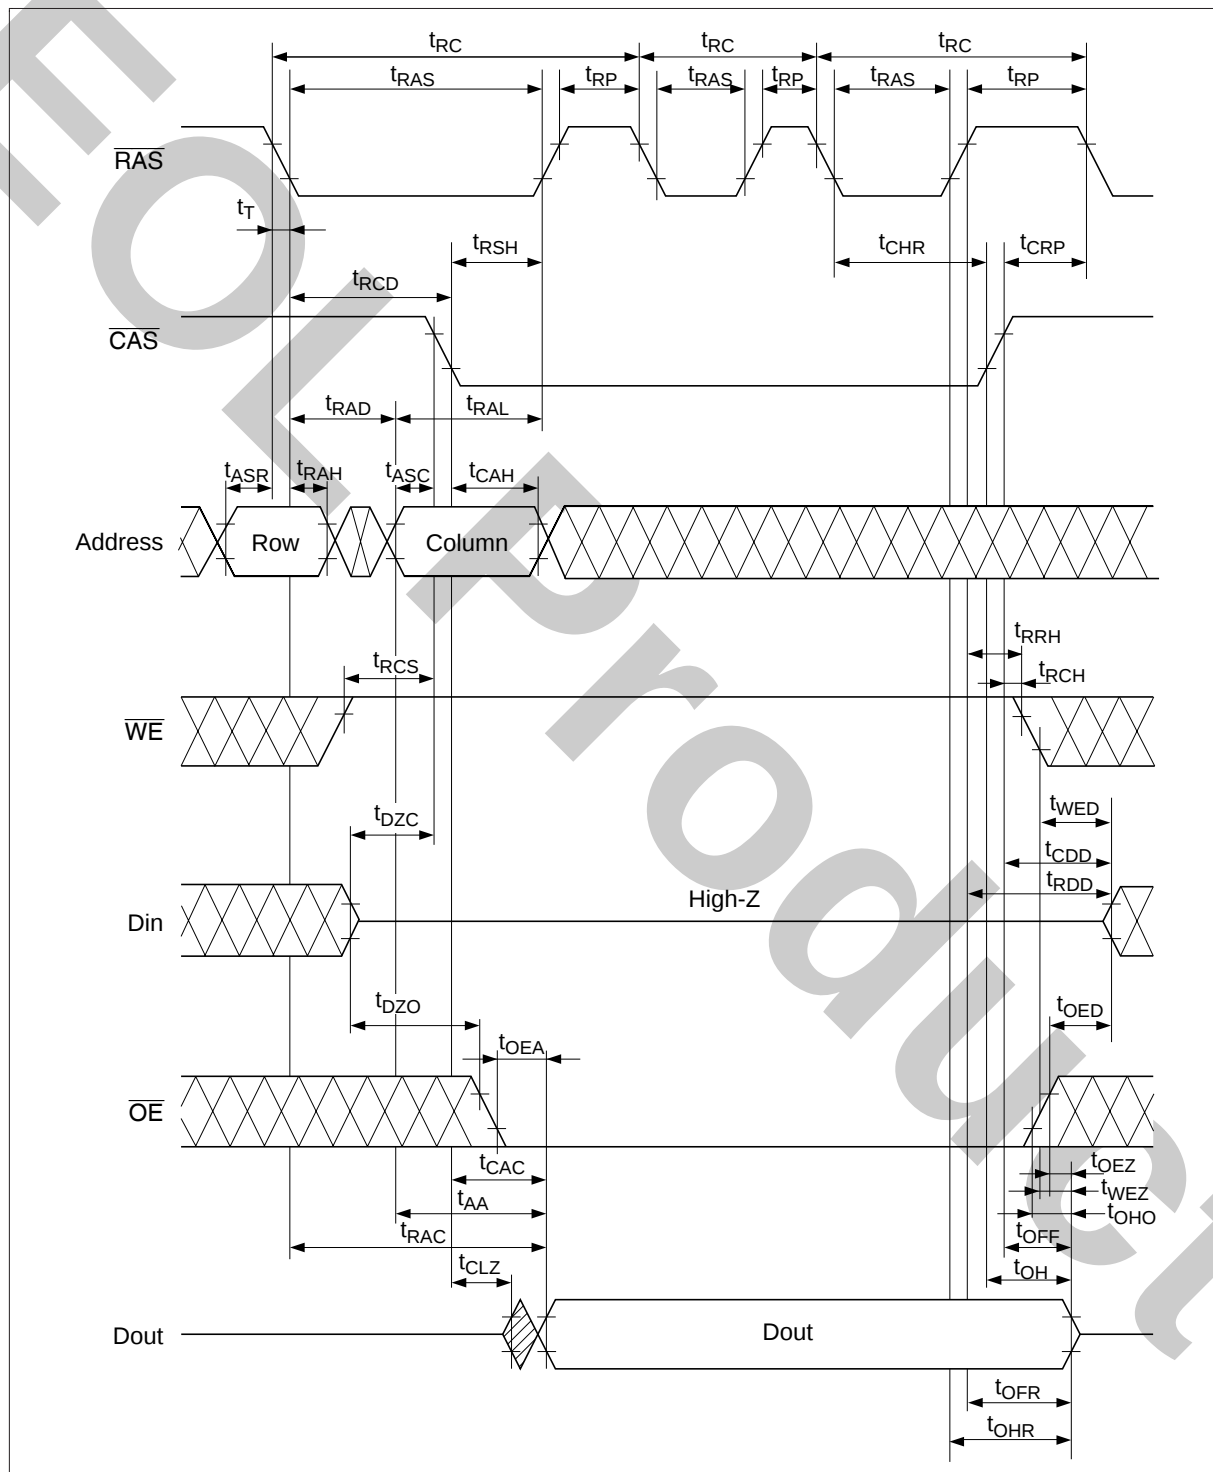


HM5113165FTD-6

EDO Page Mode Read Cycle (1)

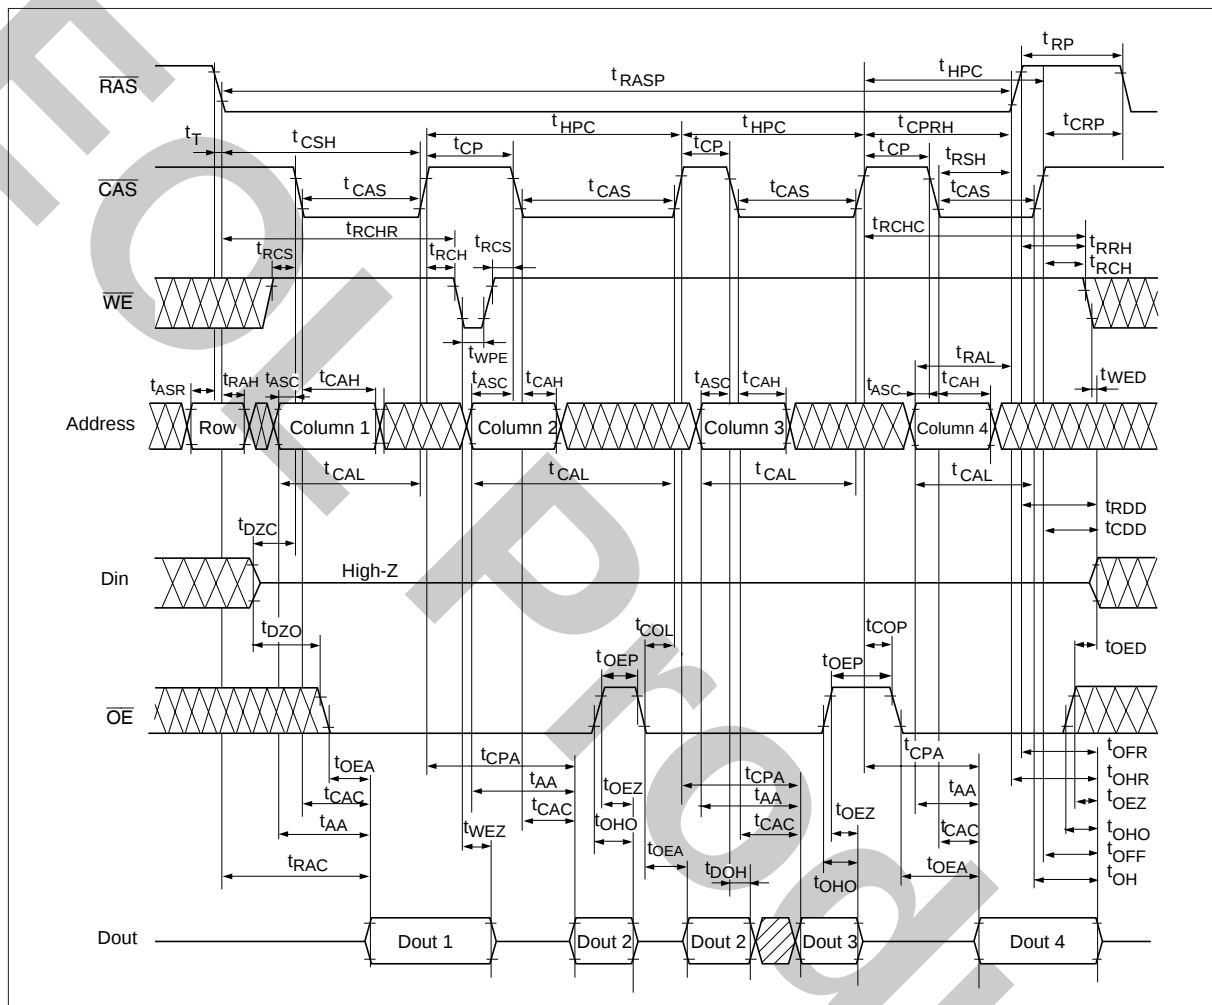


HM5113165FTD-6

EDO Page Mode Read Cycle (2)

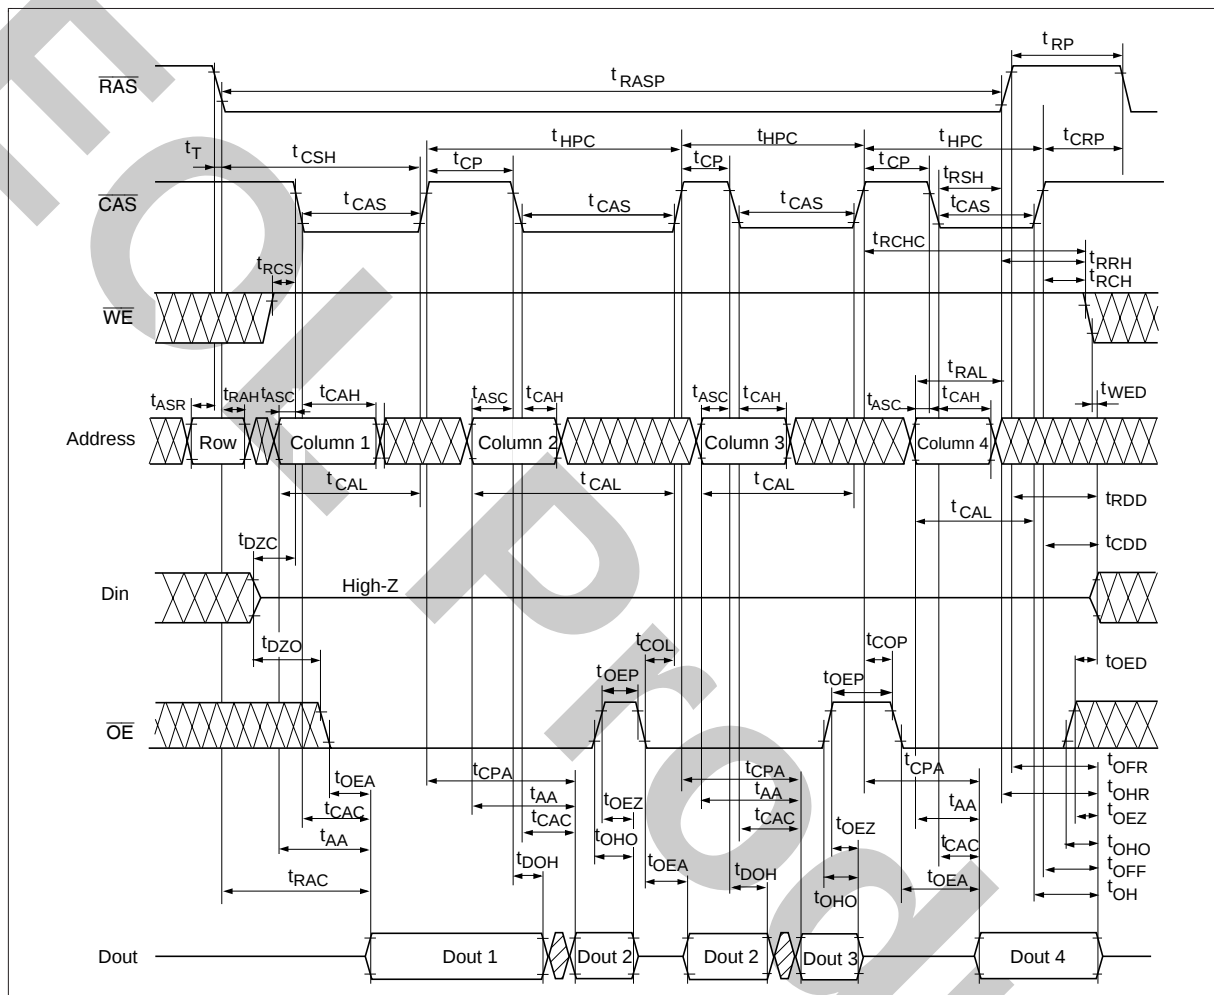


HM5113165FTD-6

EDO Page Mode Early Write Cycle

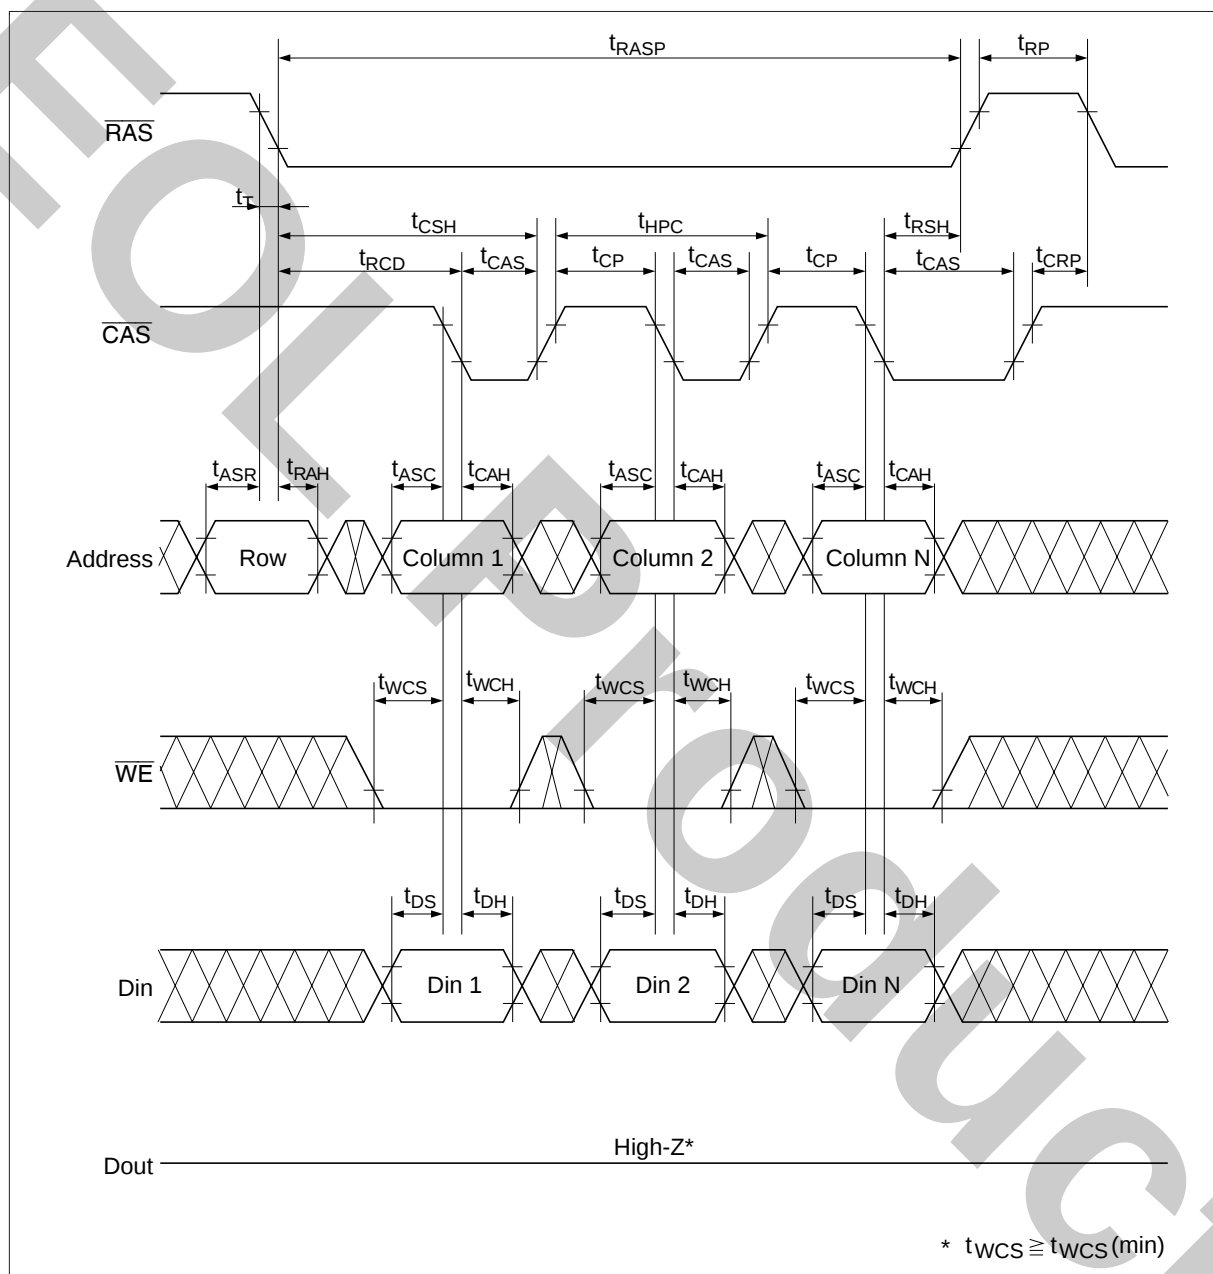


HM5113165FTD-6

EDO Page Mode Delayed Write Cycle*¹⁸

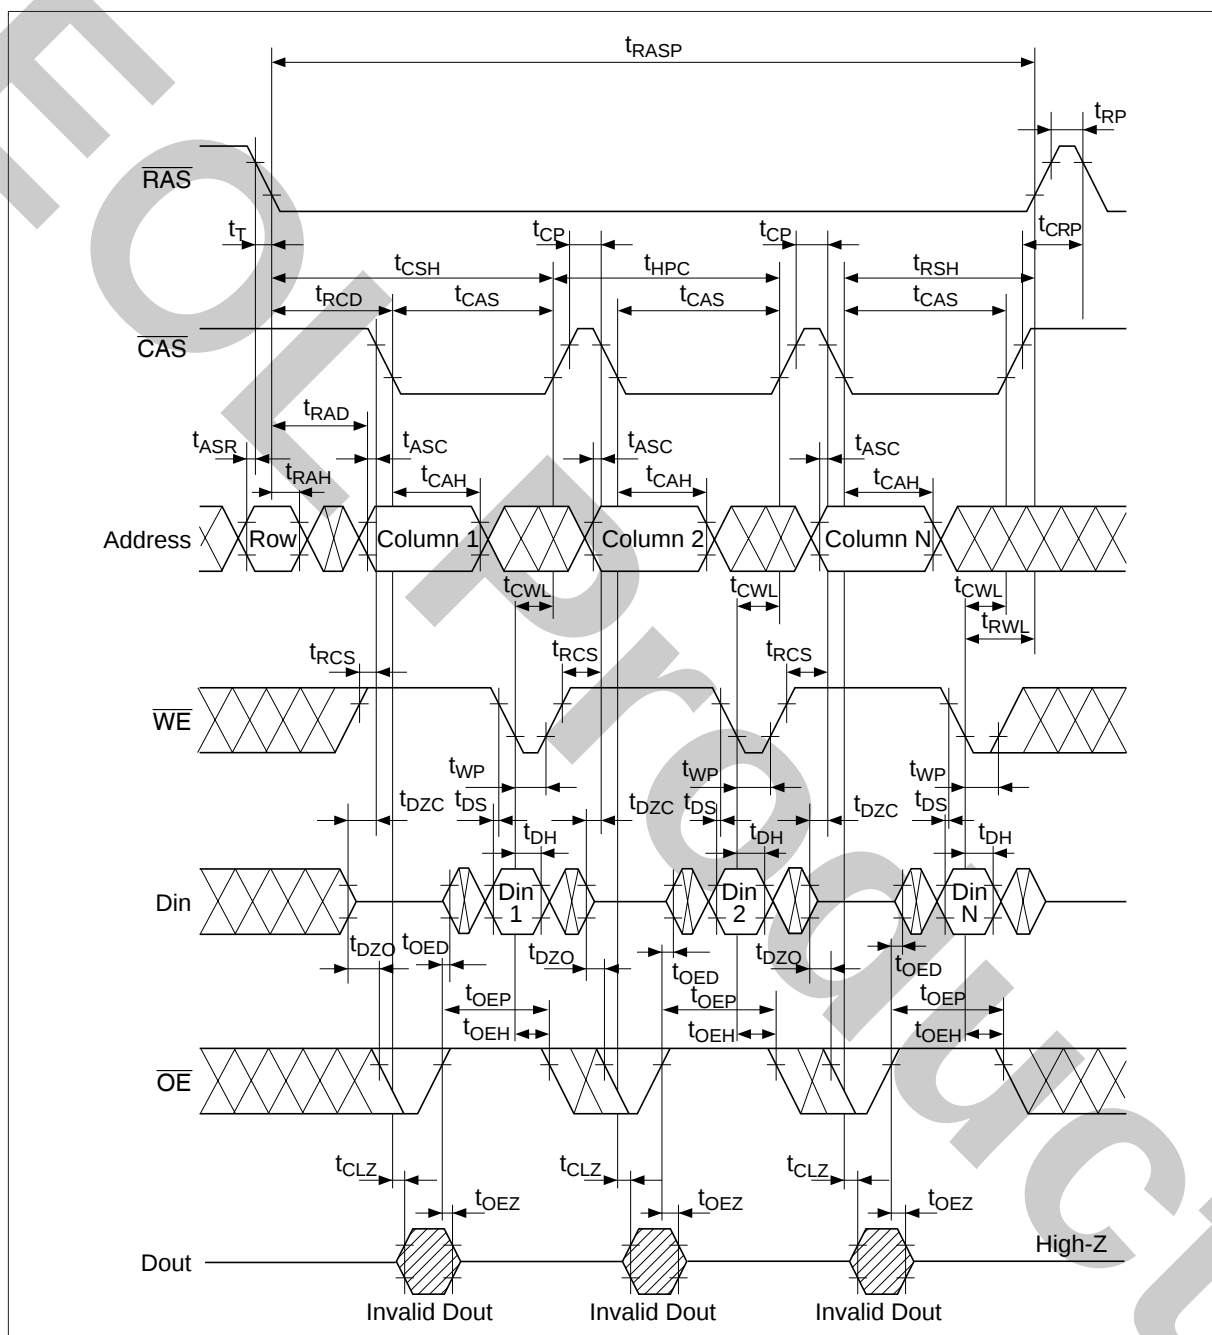


EDO Page Mode Read-Modify-Write Cycle*¹⁸

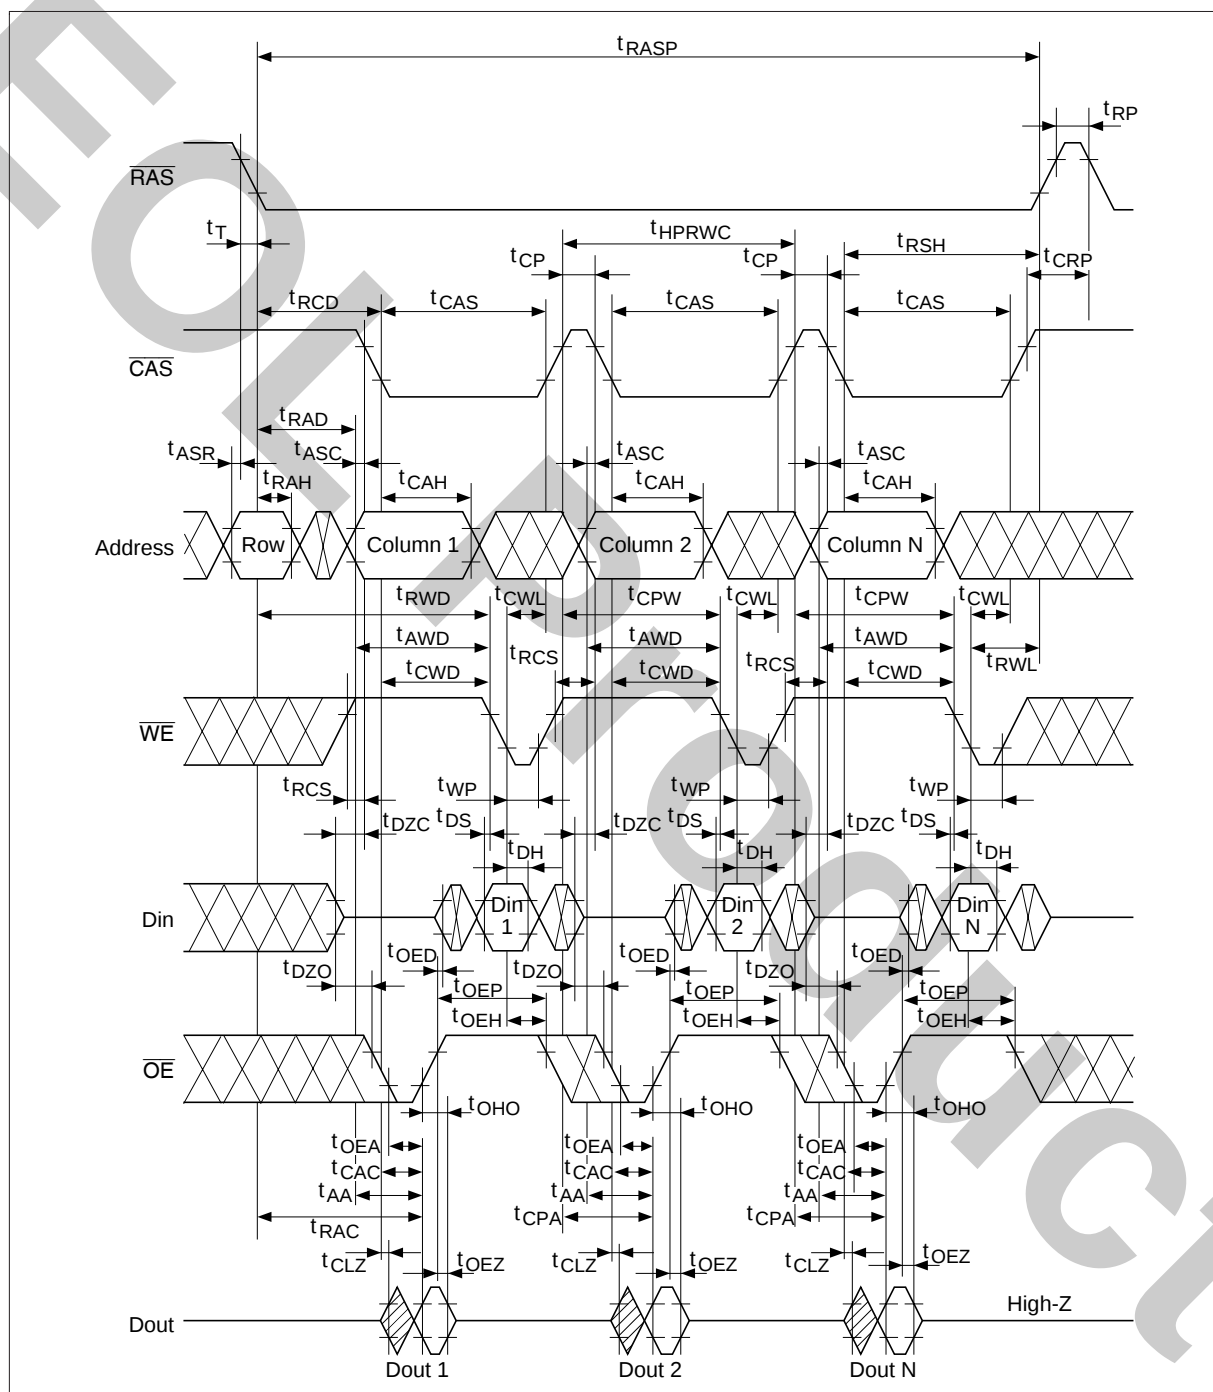


HM5113165FTD-6

EDO Page Mode Mix Cycle (1) *²⁰

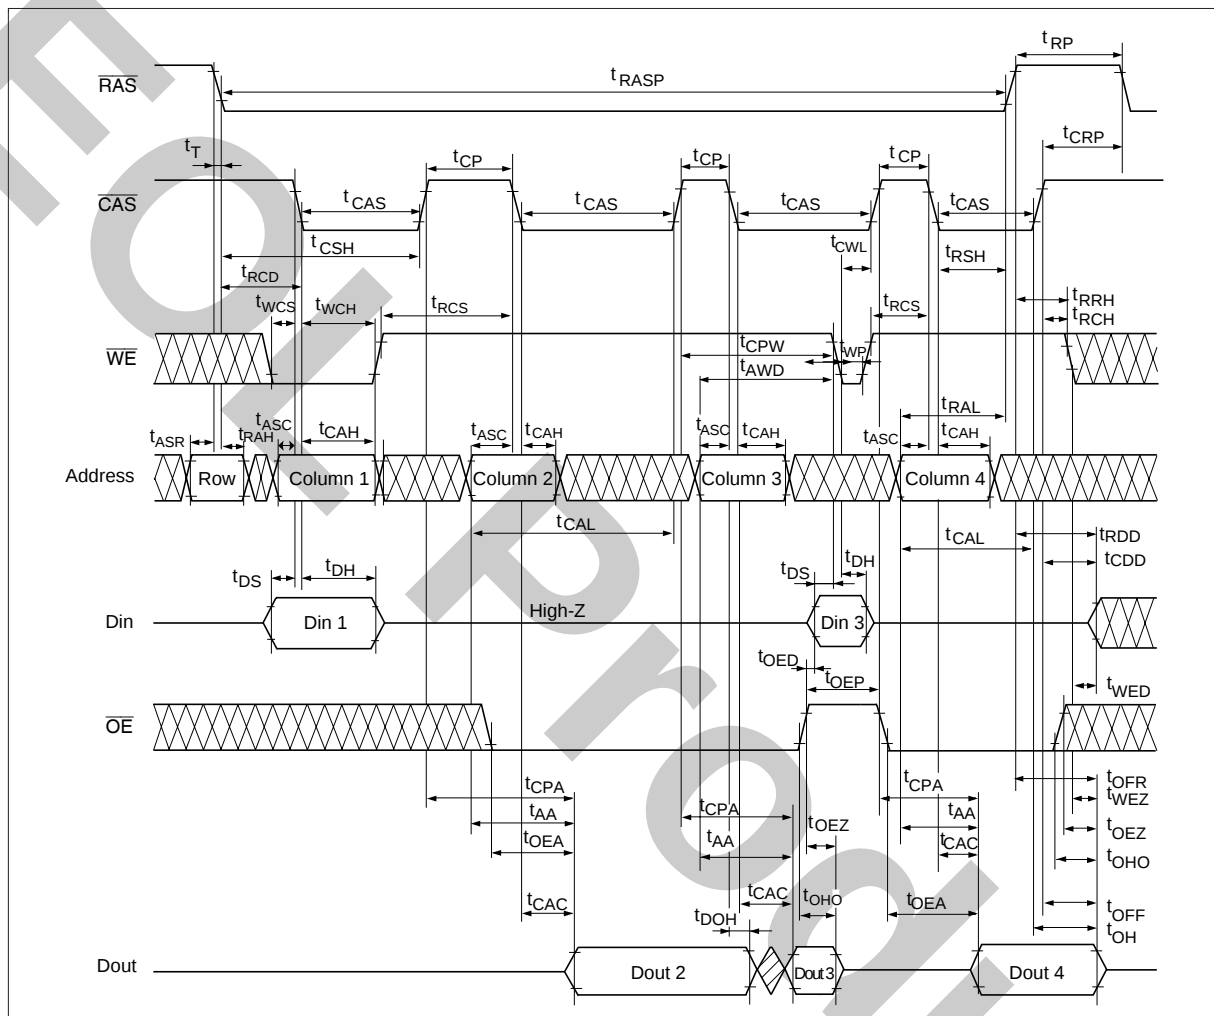

HM5113165FTD-6

EDO Page Mode Mix Cycle (2)*²⁰

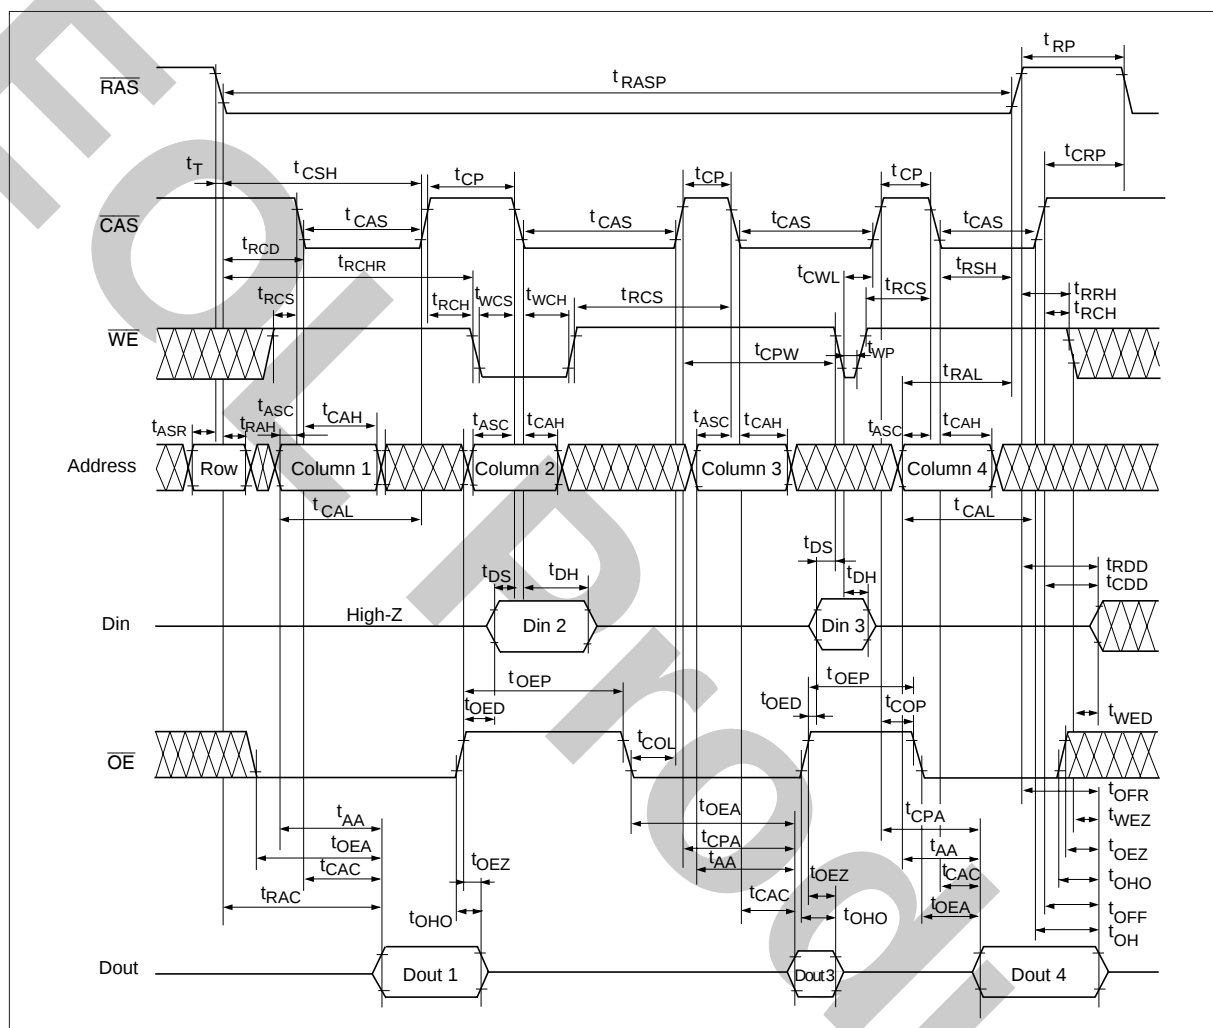


HM5113165FTD-6

Package Dimensions

HM5113165FTD Series (TTP-50DE)

As of January, 2001

Unit: mm

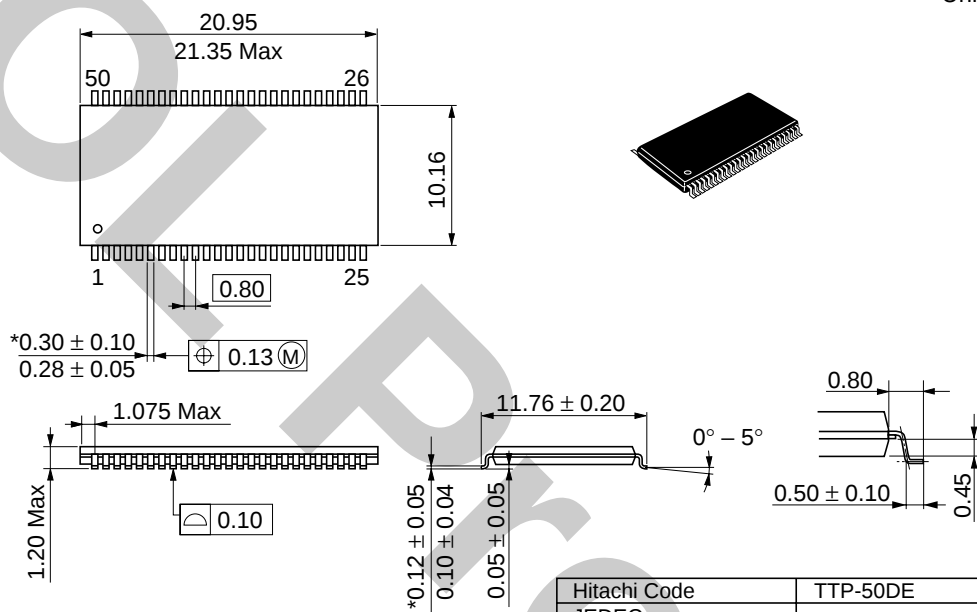
$$\frac{\text{*Dimension including the plating thickness}}{\text{Base material dimension}}$$

Hitachi Code	TTP-50DE
JEDEC	—
EIAJ	—
Mass (reference value)	0.56 g

Cautions

1. Elpida Memory, Inc. neither warrants nor grants licenses of any rights of Elpida Memory, Inc.'s or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Elpida Memory, Inc. bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Elpida Memory, Inc. makes every attempt to ensure that its products are of high quality and reliability. However, contact Elpida Memory, Inc. before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Elpida Memory, Inc. particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Elpida Memory, Inc. bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Elpida Memory, Inc. product does not cause bodily injury, fire or other consequential damage due to operation of the Elpida Memory, Inc. product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Elpida Memory, Inc..
7. Contact Elpida Memory, Inc. for any questions regarding this document or Elpida Memory, Inc. semiconductor products.

© Elpida Memory, Inc. 2001

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn