

查询"LT3E65W"供应商

> Chip LED / LED Lamp Data Sheet

☆New product

■ HIGH-LUMINOSITY (AlGaInP) LED SERIES

(Ta = 25°C)

Radiation color	Green	Yellow-green	Amber	Sunset orange	Orange	Red	
Series	ZG, JG	ZE, JE	ZV, JV, YV	ZS, JS, YS	ZJ, JJ, YJ	ZR, JR	JU
Dominant emission wavelength (nm)	560	572	588	605	618	630	638
Radiation material	AlGaInP on GaAs						

■ HIGH-LUMINOSITY (InGaN) LED SERIES

(Ta = 25°C)

Radiation color	Blue	Green
Series	BC	GC
Dominant emission wavelength (nm)	470	525
Radiation material	InGaN	

■ WHITE TYPE LED SERIES

(Ta = 25°C)

Radiation color	White	
Series	VA	BW
Color range (x, y)	(0.33, 0.33)	(0.31, 0.31)
Radiation material	InGaN + RGB fluorescent powder	InGaN + Fluorescent powder

■ LED SERIES

(Ta = 25°C)

Radiation color	Green	Yellow-green	Yellow-green (High-luminosity)	Yellow	Sunset orange	Red	Red	Red (High-luminosity)	Red (High-luminosity)	Red
Series	KG, K	EG, E, C*	FG, F	HY, H	HS, S	HD, D	HA, A	TR, T	UR, U	PR, P
Peak emission wavelength (nm)	555	565	565	585	610	635	650	660	660	685
Radiation material	GaP	GaP	GaP	GaAsP on GaP	GaAsP on GaP	GaAsP on GaP	GaAsP on GaP	GaAlAs on GaAs Single hetero	GaAlAs on GaAlAs Double hetero	GaP

* C is the opposite polarity of EG's.

■ HIGH-LUMINOSITY (AlGaInP) LED LAMPS

(If = 20 mA, Ta = 25°C)

Appearance	Radiation shape (mm)	Resin type			High-luminosity												
					JG, ZG (Green)		JE, ZE (Yellow-green)		JV, ZV (Amber)		JS, ZS (Sunset orange)		ZJ, JJ (Orange)		ZR, JR, JU (Red)		
		Colored diffusion	Colored transparency	Colorless transparency	Milk diffusion	Model No.	Luminous intensity (mcd) TYP.	Model No.	Luminous intensity (mcd) TYP.	Model No.	Luminous intensity (mcd) TYP.	Model No.	Luminous intensity (mcd) TYP.	Model No.	Luminous intensity (mcd) TYP.	Model No.	Luminous intensity (mcd) TYP.
Cylinder	ø3			●					GL3ZV402B0SE	400	GL3ZS402B0SE	400	GL3ZJ402B0SE	400	GL3ZR402B0SE	250	
				●		GL3JG402B0SE	85	GL3JE402B0SE	200						GL3JR402B0S3	200	
				●										☆ GL3JU402B0S	300		
				●				GL3ZE802B0S	80	GL3ZV802B0SE	200	GL3ZS802B0SE	210	GL3ZJ802B0SE	230	GL3ZR802B0SE	150
			●						GL3JV404B0SE	280	GL3JS404B0SE	280	GL3JJ404B0SE	200			
			●						GL3JV804B0SE	110	GL3JS804B0SE	120	GL3JJ804B0SE	100			
	ø5			●					GL5ZV152B0SE	2 700	GL5ZS152B0SE	3 000	GL5ZJ152B0SE	3 000	GL5ZR152B0SE	2 000	
				●					GL5ZV302B0SE	800	GL5ZS302B0SE	1 000	GL5ZJ302B0SE	900	GL5ZR302B0SE	600	
				●					GL5JV302B0SE	640	GL5JS302B0SE	680	GL5JJ302B0SE	570			
				●					GL0ZV042B0S	16 800	GL0ZS042B0S	22 800	GL0ZJ042B0S	18 500			
Oval	Long: 5.8 Short: 4.8			●					GL6ZV27	750	GL6ZS27	850	GL6ZJ27	750	GL6ZR27	360	
			●						GL5JV7D2D0SE	210	GL5JS7D2D0SE	230	GL5JJ7D2D0SE	190			

Taped model is also available.

Notice

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.
Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.
*RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBs and PBCEs), with certain exceptions.
Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

HIGH-LUMINOSITY LED LAMP

LED

查询"LT3E65W"供应商

☆New product


■ HIGH-LUMINOSITY LED LAMPS

(If = 20 mA, Ta = 25°C)

Appearance	Radiation shape (mm)	Resin type				High-luminosity							
		Colored diffusion	Colored transparency	Colorless transparency	Milky diffusion	BC (Blue)		GC (Green)		TR, T (Red)		UR, U (Red)	
						Model No.	Luminous intensity (mcd) TYP.	Model No.	Luminous intensity (mcd) TYP.	Model No.	Luminous intensity (mcd) TYP.	Model No.	Luminous intensity (mcd) TYP.
Cylinder	φ3	●		●						GL3TR8	60	GL3UR8	300
			●							GL3TR44	110	GL3UR44	250
				●						GL3TR43	20	GL3UR43	100
				●		☆ GL3BC302B0S2	900						
				●		GL3BC402B0SC	200	GL3GC402B0SC	810			GL3UR402B0S	350
				●		GL3BC402B0S1	450	GL3GC402B0S1	1 800				
			●		GL3B2402B0SC	650	GL3G2402B0SC	2 800					
	φ5	●		●						GL5TR8	80		
				●								GL5UR44	650
			●									GL5UR2K	2 000
			●									GL5UR3K	3 000
				●						GL5TR43	500	GL5UR2K1	2 000
				●								GL5UR3K1	3 000
				●		GL5B2302B0SC	1 200						
				●		GL5BC302B0S1	700	GL5GC302B0S1	1 700				
				●								GL6UR11T ^{*1}	300
				●								GL6UR31	950
											GL6UR26T ^{*1}	400	
Oval	Long: 5.8 Short: 4.6		●									GL6UR26T ^{*1}	400
Rectangle	2.0 × 5.0	●								GL8TR21	4	GL8UR21	16
	1.8 × 3.9	●								GL8TR42	4		

*1 With tie-bar

Taped model is also available.

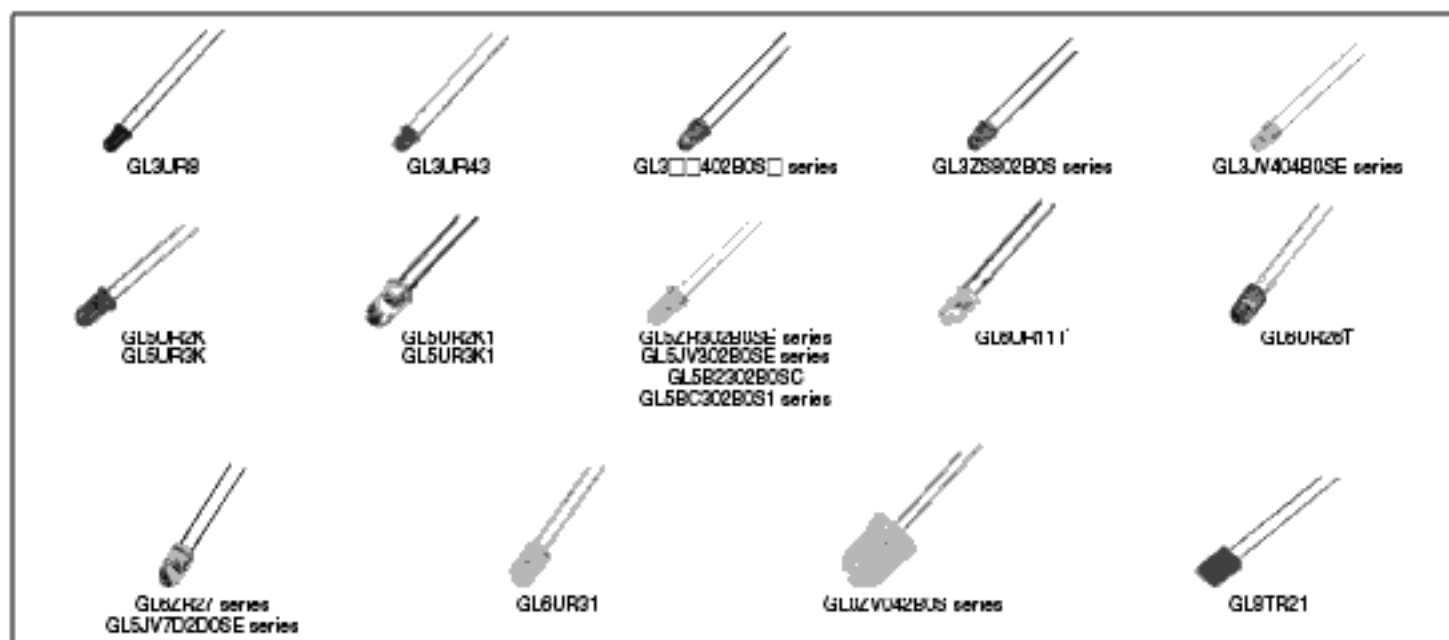

Notice

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.
 Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.
 *RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBs and PBDEs), with certain exceptions.
 Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

Appearance		Radiation shape (mm)		Green		Yellow-green		Yellow-green (HL)		Yellow		Sunset orange		Red		Red				
		Colored diffusion	Colored transparency	Colorless transparency	Milky diffusion	(555 nm)	Luminous intensity (mcd) TYP.	(565 nm)	Luminous intensity (mcd) TYP.	(565 nm)	Luminous intensity (mcd) TYP.	(585 nm)	Luminous intensity (mcd) TYP.	(610 nm)	Luminous intensity (mcd) TYP.	(635 nm)	Luminous intensity (mcd) TYP.	(695 nm)	Luminous intensity (mcd) TYP.	
Cylinder	ø3	●				GL3KG8	30	GL3EG8	60			GL3HY8	55	GL3HS8	60	GL3HD8	40	GL3PR8	8	
			●					GL3EG41	130											
				●		GL3KG44	60	GL3EG44	130			GL3HY44	100	GL3HS44	100	GL3HD44	110	GL3PR44	12	
						GL3KG43	20	GL3EG43	38			GL3HY43	25	GL3HS43	25	GL3HD43	25	GL3PR43	3	
			●			GL3KG62	22	GL3EG62	65			GL3HY62	40	GL3HS62	40	GL3HD62	50			
		●				GL3KG63	6	GL3EG63	18			GL3HY63	16	GL3HS63	15	GL3HD63	17	GL3PR63	2	
		●						LT3E31W*2	18			LT3H31W*2	15			LT3D31W*2	15	LT3P31W*2	1.5	
		●						LT3E65W*2	25			LT3H65W*2	25	LT3S65W*2	25	LT3D65W*2	25	LT3P65W*2	3	
		ø4	●				GL4KG8	30	GL4EG8	100			GL4HY8	110	GL4HS8	80	GL4HD8	110	GL4PR8	15
		●						GL5EG4	20							GL5HD4	25	GL5PR4	3	
		●				GL5KG8	60	GL5EG8	150			GL5HY8	120	GL5HS8	80	GL5HD8	80	GL5PR8	15	
		●				GL5KG41	70	GL5EG41	160			GL5HY41	100	GL5HS41	100	GL5HD41	150	GL5PR41	15	
		●				GL5KG44	70	GL5EG44	160			GL5HY44	100	GL5HS44	100	GL5HD44	100	GL5PR44	15	
		ø5	●						GL5EG26/BO5B	150						GL5HD26/BO5B	80	GL5PR26/BO5B	15	
		●						GL5EG40	250			GL5HY40	250	GL5HS40	200	GL5HD40	250	GL5PR40	35	
		●				GL5KG43	120	GL5EG43	300	GL5FG43	600	GL5HY43	250	GL5HS43	250	GL5HD43	300			
		●						GL5EG60	23							GL5HD60	8			
●						GL6EG11T*3	120													
ø5 (inverted cone)	●							GL5EG47	15					GL5HS47	6	GL5HD47	8			
Oval	Long: 5.8 Short: 4.6	●						GL6EG26T*3	140											
Convex	ø2	●						GL2EG6	15			GL2HY6	12			GL2HD6	12	GL2PR6	1.5	
Arch	2.5 × 5.0	●						GL8EG2	30							GL8HD2	30			
	2.0 × 3.1	●						GL8EG4	50							GL8HD4	40			
	1.8 × 3.9	●				GL8KG42	1.5	GL8EG42	5			GL8HY42	6			GL8HD42	5	GL8PR42	0.7	
	1.9 × 3.9	●						GL8EG5	28			GL8HY5	25			GL8HD5	22			
	2.0 × 3.2	●				GL8KG25	9	GL8EG25	12			GL8HY25	12	GL8HS25	10	GL8HD25	12	GL8PR25	1.5	
Rectangle	2.0 × 3.2	●				GL8KG29	5	GL8EG29	12			GL8HY29	10	GL8HS29	7		GL8PR29	3		
	2.0 × 4.5	●						GL8EG23	6			GL8HY23	8			GL8HD23	6			
	2.0 × 5.0	●				GL8KG21	4	GL8EG21	8			GL8HY21	8	GL8HS21	8	GL8HD21	8	GL8PR21	0.7	
	●				GL8KG26	4	GL8EG26	8			GL8HY26	8			GL8HD26	8	GL8PR26	0.7		
	●				GL8KG22	3.5	GL8EG22	6			GL8HY22	5	GL8HS22	5	GL8HD22	8	GL8PR22	1.2		
Square	5.0 × 5.0	●																		
Triangle	Isosceles triangle	●																		

*1 PR series (Red): If = 5 mA (GL8PR25, GL8PR29; If = 10 mA)

*2 Taped model

*3 With tie-bar

HL: High-luminosity


Notice

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.

Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.

*RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBS and PBDEs), with certain exceptions.

Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.



					
GL3PR8 series	GL3PR44 series	GL3HY43 series	GL3KG62 series	LT3E31W series	GL3PR63 series
					
LT3E65W series	GL4PR8 series	GL5PR4 series	GL5HS8 series	GL5KG4 1 series	GL5PR44 series
					
GL5EG40 series	GL5HY43 series	GL5EG60 series	GL6EG11T	GL5HD47 series	
					
GL6EG26T	GL2HY6	GL8EG2 series	GL8HD4 series		
					
GL8KG42 series	GL8KG25 series	GL8HY29 series	GL8HD23 series	GL8HS21 series	GL8HY26 series
					
GL8HD22 series	GL8PR28				

Notice
In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.
Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.
*RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBs and PBDEs), with certain exceptions.
Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.


Radiation shape (mm)	Appearance			Yellow- + Orange green (HL)	Luminous intensity (mcd) TYP.	Yellow- + Red green (HL)	Luminous intensity (mcd) TYP.	Yellow- + Red green	Luminous intensity (mcd) TYP.	Yellow- + Red green	Luminous intensity (mcd) TYP.	Yellow + Yellow green	Luminous intensity (mcd) TYP.	Yellow + Red	Luminous intensity (mcd) TYP.		
	Colored diffusion	Colored transparency	Colorless transparency													Milky diffusion	
Cylinder	ø3				GL5ELJ502C0X*2	110/170		GL5CU44	100/240	GL5EP5	40/9	GL3ED8	20/15		GL5HP5	15/9	
	ø5			●				GL6CU7	120/250			GL5ED4	80/50				
				●								GL5ED60	11/8				
Rectangle	1.9 × 3.9			●								GL8ED5	10/6.5		GL8HP5	3/1.5	
	2.0 × 5.0			●								GL9ED2	8/3	GL9EH2	6/2	GL9HP2	1/0.8
	5.0 × 5.0			●								GL9ED4	7/4				

* CU series: Common anode pin connection

* 1 P (Red) and H (yellow): IF = 10 mA

* 2 Taped model

HL: High-luminosity

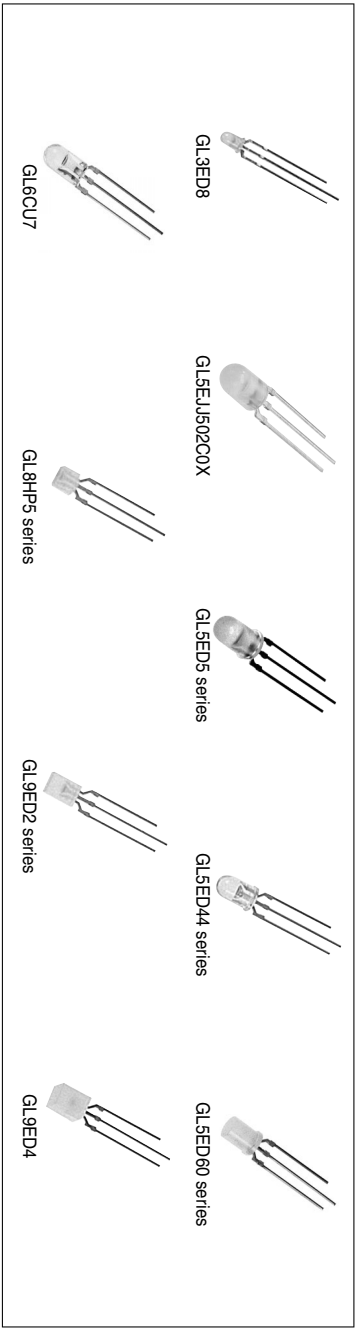

Notice

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.

Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.

RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBs and PBDEs), with certain exceptions.

Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

Outline dimensions (mm)	Colored diffusion	Colored transparency	Colorless transparency	Milky diffusion	Green		Yellow-green		Amber		Sunset orange		Orange		Red	
					Luminous intensity (mcd) TYP.		Luminous intensity (mcd) TYP.		Luminous intensity (mcd) TYP.		Luminous intensity (mcd) TYP.		Luminous intensity (mcd) TYP.		Luminous intensity (mcd) TYP.	
1.6×0.8 (T:0.35)		●					GM1JES200AE*1	13	GM1JV3200AE*1	18.8	GM1JSS200AE*1	19	GM1JJS200AE*1	19	GM1JRS200AE*1	13
1.6×0.8 (T:0.55)		●					GM1JES200AE*1	13	GM1JV5200AE*1	16.8	GM1JSS200AE*1	20.9	GM1JJS200AE*1	19		
1.6×0.8 (T:0.8)			●	LT1ZG67A	6.1		LT1ZE67A	25.4	LT1ZV67A	78.7	LT1ZS67A	123.2	LT1ZJ67A	123.3	LT1ZR67A	73.9
			●						GM1ZV80300AE	75	GM1ZSR80300AE	75	GM1ZJ80300AE	75	GM1ZRR80300AE	55
			●				LT1JV67A*1	16.5	LT1JS67A*1	14.1						
2.0×1.25 (T:0.8)			●	LT1ZG40A	6.2		LT1ZE40A	28.2	LT1ZV40A	92.7	LT1ZS40A	144.1	LT1ZJ40A	127.8	LT1ZRA40A	78.7
			●						GM1ZV40300AE	60	GM1ZSA0300AE	78	GM1ZJA0300AE	60	GM1ZRA0300AE	55
			●						GM1JV40300AE	11	GM1JSA0300AE	12	GM1JJA0300AE	9.5		
3.2×2.8 (T:1.9)			●	LT1ZG95A	15		LT1ZE95A	45	LT1ZV95A	170	LT1ZS95A	290	LT1ZJ95A	200	GM5ZRR9200AE	100
			●						GM5JV9200AE	80	GM5JSS9200AE	90	GM5JJS9200AE	70		
			●						GM5ZV01200A*3	500	GM5ZS01200A*3	700	GM5ZJ01200A*3	500	GM5ZRR01200A*3	400
6.0×5.0 (T:2.5)			●						GM5VVO1210A*4	1 300	GM5VSO1210A*4	1 700	GM5VJO1210A*4	1 500		
			●						GM5ZV03200Z*3	500	GM5ZS03200Z*3	700	GM5ZJ03200Z*3	500	GM5ZRR03200Z*3	400
			●						GM4JV81200AE*2	35	GM4JS81200AE*2	40	GM4JJ81200AE*2	40	GM4JRR1200AE*2	30
1.6×1.15 (T:0.8) (Side emitting)			●												★ GM4JRR1250AE*2 (45)	
2.7×1.3 (T:1.2) (Side emitting)			●						LT1JV45A*1	20	LT1JS45A*1	24	LT1JJ45A*1	16		

*1. LT1JS67A, LT1JV67A, GM1JV55200AE series, GM1JV35200AE series, GM1JV40300AE series, LT1JV45A series: If = 5 mA
 *2. GM4JV81200AE series: If = 10 mA
 *3. GM5ZRR01200A series, GM5ZRR03200Z series: If = 60 mA
 *4. GM5VVO1210A series: If = 90 mA


Notice

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.

Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.

*RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBs and PBDEs), with certain exceptions.

Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.



[查询"LT3E65W"供应商](#)

Outline dimensions (mm)	Resin type				Blue BC	Luminous intensity (mcd) TYP.	Green GC	Luminous intensity (mcd) TYP.
	Colored diffusion	Colored transparency	Colorless transparency	Milky diffusion				
1.6 × 0.8 (T: 0.35)			●	●	★ GM1BC35370AC*1	23	GM1GC35200AC	54
1.6 × 0.8 (T: 0.55)			●		★ GM1BC55270AC*1	23	GM1GC55200AC	47
3.2 × 2.8 (T: 1.9)			●		GM5BC95200AC*2	73	GM5GC95200AC*2	311
			●		★ GM5BC95250AC*2	120	★ GM5GC95250AC*2	500
			●		★ GM5BC95270AC*2	370		
6.0 × 5.0 (T: 2.5)			●		GM5BC01200AC*3	200	GM5GC01200AC*3	520
			●		★ GM5BC01250AC*3	300	★ GM5GC01250AC*3	1 200
			●		★ GM5BC01270AC*3	550		
6.0 × 5.0 (T: 2.3) board insertion type			●		GM5BC03200Z*3	200	GM5GC03200Z*3	520
			●		☆ GM5BC03210Z*3	300		
1.6 × 1.15 × 0.8 (Side emitting)			●		★ GM4BC81250AC	50	★ GM4GC81250AC	170
2.7 × 1.3 × 1.2 (Side emitting)				●	GM4BC13300AC	12	GM4GC13300AC	46

*1 GM1BC35370AC, GM1BC55270AC: If = 5 mA
*2 GM5BC95200AC series, GM5BC95250AC series: If = 20 mA
*3 GM5BC01200AC series, GM5BC01250AC series, GM5BC03200Z series: If = 50 mA

Notice

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.
Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.
RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBs and PBDEs), with certain exceptions.
Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

Outline dimensions (mm)	Resin type				Green	Luminous intensity (mcd) TYP.	Yellow-green	Luminous intensity (mcd) TYP.	Yellow	Luminous intensity (mcd) TYP.
	Colored diffusion	Colored transparency	Colorless transparency	Milky diffusion						
1.6 × 0.8 (T: 0.35)		●	●				GM1EG35200A	19		
1.6 × 0.8 (T: 0.55)			●				GM1EG55200A	19	GM1HY55200A	11.5
1.6 × 0.8 (T: 0.6)				●			LT1E97A	23	LT1H97A	9.8
1.6 × 0.8 (T: 0.8)				●	LT1K67A	3.8	LT1E67A LT1F67A LT1F67AF	23	LT1H67A	8.3
2.0 × 1.25 (T: 0.8)				●	LT1K40A	5	LT1E40A	19	LT1H40A	10.8
3.2 × 2.8 (T: 1.9)			●				GM5EG95200A	18.1		
1.6 × 1.15 × 0.8 (Side emitting)			●				GM4EG81200A	20		
2.7 × 1.3 × 1.2 (Side emitting)				●			LT1E45A	29		

Outline dimensions (mm)	Resin type		S	H	S	D	H	D	U	R	U	R	P	Luminous intensity (mcd) TYP.
	Colored diffusion	Colored transparency												
1.6 × 0.8 (T: 0.55)					Colored diffusion				Colored transparency				Colored transparency	
1.6 × 0.8 (T: 0.6)			●		Colored transparency				Colorless transparency				Colorless transparency	
1.6 × 0.8 (T: 0.8)					Milky diffusion				Milky diffusion				Milky diffusion	
1.6 × 0.8 (T: 0.55)					Sunset orange				Sunset orange				Sunset orange	
1.6 × 0.8 (T: 0.6)					Luminous intensity (mcd) TYP.				Luminous intensity (mcd) TYP.				Luminous intensity (mcd) TYP.	
1.6 × 0.8 (T: 0.8)					Red				Red				Red	
2.0 × 1.25 (T: 0.8)					Luminous intensity (mcd) TYP.				Luminous intensity (mcd) TYP.				Luminous intensity (mcd) TYP.	
3.2 × 2.8 (T: 1.9)					Red (HL)				Red (HL)				Red (HL)	

*1 P (Red) series: If = 5 mA

HL: High-luminosity

LT1D67A series LT1ZR67A series LT1JS67A series GM1ZV/80300AE series	 	LT1D97A series GM1EG55200A series GM1JV55200AE series GM1BC55250AC series	 
GM1JV35200AE series GM1EG35200A GM1BC35200AC series GM1BC35310AC	 	LT1E45A series LT1JV45A series GM4BC13300AC series	 
GM5ZR01200A series, GM5BC01200AC series GM5BC01250AC series, GM5YV01210A series		GM5ZY03200Z series GM5BC03200Z series	
Taped model 			

Notice

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.

Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.

*RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBs and PBDEs), with certain exceptions.

Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

Outline dimensions (mm)	Resin type			ZV BC Amber + Blue	ZS GC Sunset orange + Green
	Colored diffusion	Colored transparency	Colorless transparency		
1.6 × 1.6 (T: 0.8)				● Milky diffusion	GM1ZVB80300A 43.8/14.4 Luminous intensity (mcd) TYP. GM1ZSG80300A 66/46.1 Luminous intensity (mcd) TYP.

(I F = 40 mA, Ta = 25°C)

Outline dimensions (mm)	Resin type			BC GC Blue + Green	BC ZR Blue + Red	GC ZR Green + Red
	Colored diffusion	Colored transparency	Colorless transparency			
6.0 × 5.0 (T: 2.5)			● Milky diffusion	GM5BG01210A 300/860 Luminous intensity (mcd) TYP.	GM5ZRB01210A 300/580 Luminous intensity (mcd) TYP.	GM5ZRG01210A 860/580 Luminous intensity (mcd) TYP.

DICHROMATIC TYPE CHIP LEDs (Taped models only)

(I F = 20 mA, Ta = 25°C)

Outline dimensions (mm)	Resin type			E H Yellow-green + Yellow	E D Yellow-green + Red
	Colored diffusion	Colored transparency	Colorless transparency		
1.6 × 1.6 (T: 0.8)			● Milky diffusion	LT1EH67A 19/8.3 Luminous intensity (mcd) TYP.	LT1ED67A 19/8.3 Luminous intensity (mcd) TYP.




GM5BG01210A series

LT1ED67A series

 GM1ZVB80300A series

HIGH-LUMINOSITY WHITE TYPE CHIP LEDs (with blue chip) (Taped models only)

(Ta = 25°C)

Outline dimensions (mm)	Color coordinates (x, y)	Radiation color	BW White	
			Luminous intensity (mcd) TYP.	
3.2 × 2.8 (T: 1.9)	(0.31, 0.3)	White	★ GM5BW95300A*1	1 100
6.0 × 5.0 (T: 1.5) 6-terminal leadless	(0.31, 0.31)	White	★ GM5BW01300A*3	4 200
6.0 × 5.0 (T: 2.5) 4-terminal leadless	(0.31, 0.31)	White	★ GM5BW01301A*2	1 800

*1 GM5BW95300A: I F = 20 mA *2 GM5BW01301A: I F = 40 mA *3 GM5BW01300A: I F = 35 mA/chip





GM5BW95300A

GM5BW01300A

 GM5BW01301A


Notice

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.

Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.

*RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBs and PBDEs), with certain exceptions.

Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.



Outline dimensions (mm)	Color coordinates (x, y)	Radiation color	Luminous intensity (mcd) TYP.
6.0 × 5.0 (T: 2.5) 4-terminal leadless	(0.33, 0.33)	White	★ GM5VA33331AC 450
	(0.34, 0.40)	Yellowish white	★ GM5VA34400AC (700)
	(0.29, 0.27)	Purplish white	★ GM5VA29270AC (350)
	(0.30, 0.50)	Greenish white	★ GM5VA30500AC (900)

() indicates reference value.



GM5VA33331AC

HIGH-LUMINOSITY DICHROMATIC TYPE CHIP LEDS (RGB 3-color) (Taped models only)

(Ta = 25°C)

Outline dimensions (mm)	Resin type			Luminous intensity (mcd) TYP.
	Colored diffusion	Colored transparency	Colorless transparency	
1.6 × 1.6 (T: 0.55)			● Milky diffusion	★ GM1WA55360A*1 125/150/55
1.6 × 1.6 (T: 0.8)			●	GM1WA80350A*2 80/92/30
6.0 × 5.0 (T: 2.5) 4-terminal leadless		●		GM5WA02200A*3 850 [Mixed color]
6.0 × 5.0 (T: 2.5)*7 6-terminal leadless		●		GM5WA06203A*3 850 [Mixed color]
		●		GM5WA06210A*4 250/400/350
		●		GM5WA06250A*5 1 400 [Mixed color]
		●		GM5WA06260A*3 1 725 [Mixed color]
6.0 × 5.0 (T: 2.3 [resin part]) 6-terminal		●		GM5WA06270A*6 3 000 [Mixed color]
		●		GM5WA06200Z*3 850 [Mixed color]
		●		GM5WA06203Z*3 850 [Mixed color]
		●		GM5WA06250Z*4 1 400 [Mixed color]
6.0 × 5.0 (T: 1.5) 6-terminal leadless			●	☆ GM5WA05360A*6 2 200 [Mixed color]

*1 GM1WA55360A: If = 10 mA (Red, Green, Blue)
*2 GM1WA80350A: If = 20 mA (Red), If = 10 mA (Green, Blue)
*3 GM5WA02200A, GM5WA06203A, GM5WA06260A, GM5WA06200Z, GM5WA06203Z: If = 40 mA (Red, Green), If = 20 mA (Blue)
*4 GM5WA06210A: If = 40 mA (Red, Green, Blue)
*5 GM5WA06250A, GM5WA06250Z: If = 35 mA (Red, Green), If = 20 mA (Blue)
*6 GM5WA06270A, GM5WA05360A: If = 35 mA (Red, Green, Blue)
*7 GM5WA06270A: T: 2.4 mm



Notice
In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.
Except where specially indicated, models listed on this page comply with the RoHS Directive*. For details, please contact SHARP.
*RoHS Directive: Prohibits use of lead, cadmium, hexavalent chromium, mercury and specific brominated flame retardants (PBBs and PBDEs), with certain exceptions.
Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

() indicates reference value.



GW01M59001PE

LED DRIVERS

Model No.	Description	Function	Supply voltage (V)	Package
★IR2D20N/U	24-dot LED panel driver with constant-current sink outputs	• Output current (constant-current sink outputs) : 30 mA (MAX.) (setup by external resistor) • Graduation function (clock cycle setting or external synchronization) • Independent current control for three systems (for RGB LED) • LED drive voltage : 15 V • Rated output voltage : 20 V (MAX.) • f_{osc} : 20 MHz (MAX.) /16.6 MHz (MAX.) (at cascade connection)	4.5 to 5.5	P-SSOP056-0600/ P-HQFN052-0707
★IR2D07N1	16-dot LED panel driver with constant-current sink outputs	• Output current (constant-current sink outputs) : 60 mA (MAX.) (setup by external resistor) • Rated output voltage : 7 V (MAX.) • f_{osc} : 20 MHz (MAX.) /16.6 MHz (MAX.) (at cascade connection)	3.0 to 5.5	P-SSOP040-0300
★IR2E46U6/Y6	RGB LED driver for flash lights and illuminations	• Output current : 155 mA/ch (MAX.) (3ch) (in flash mode) • Control by I²C bus • Illumination mode (64 levels/ch) • Flash mode (32 levels/ch) • Brightness adjustment	2.7 to 4.5	P-VQFN032-0505/ WL-CSP**1
★IR2E47U6	White LED driver for back light	• Output current : 20 mA (MAX.) (setup by external resistor) • Independent current control for two systems (4 outputs and 2 outputs) • LED non-connected judging function • Brightness adjustment	2.7 to 5.5	P-VQFN024-0404 (*2)
★IR2E48U6		• Output current : 20 mA (MAX.) • LED non-connected judging function • Brightness adjustment		P-VQFN024-0404

*1 WL-CSP : Water-level CSP
 *2. Contact a SHARP sales office regarding a water-level CSP.

[查询"LT3E65W"供应商](#)

Notice
 In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.