



September 1988  
Revised November 1999

# 74AC86

## Quad 2-Input Exclusive-OR Gate

### General Description

The AC86 contains four, 2-input exclusive-OR gates.

### Features


- $I_{CC}$  reduced by 50%
- Outputs source/sink 24 mA

### Ordering Code:


| Order Number | Package Number | Package Description                                                               |
|--------------|----------------|-----------------------------------------------------------------------------------|
| 74AC86SC     | M14A           | 14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150" Narrow Body |
| 74AC86SJ     | M14D           | 14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide                     |
| 74AC86MTC    | MTC14          | 14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide       |
| 74AC86PC     | N14A           | 14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide            |

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

### Connection Diagram



### Logic Symbol



### Pin Descriptions

| Pin Names                      | Description |
|--------------------------------|-------------|
| A <sub>0</sub> –A <sub>3</sub> | Inputs      |
| B <sub>0</sub> –B <sub>3</sub> | Inputs      |
| O <sub>0</sub> –O <sub>3</sub> | Outputs     |

FACT™ is a trademark of Fairchild Semiconductor Corporation.

74AC86

## Absolute Maximum Ratings<sup>(Note 1)</sup>

|                                            |                          |
|--------------------------------------------|--------------------------|
| Supply Voltage ( $V_{CC}$ )                | -0.5V to +7.0V           |
| DC Input Diode Current ( $I_{IK}$ )        |                          |
| $V_I = 0.5V$                               | -20 mA                   |
| $V_I = V_{CC} + 0.5V$                      | +20 mA                   |
| DC Input Voltage ( $V_I$ )                 | -0.5V to $V_{CC} + 0.5V$ |
| DC Output Diode Current ( $I_{OK}$ )       |                          |
| $V_O = -0.5V$                              | -20 mA                   |
| $V_O = V_{CC} + 0.5V$                      | +20 mA                   |
| DC Output Voltage ( $V_O$ )                | -0.5V to $V_{CC} + 0.5V$ |
| DC Output Source or Sink Current ( $I_O$ ) | $\pm 50$ mA              |
| DC $V_{CC}$ or Ground Current              |                          |
| Per Output Pin ( $I_{CC}$ or $I_{GND}$ )   | $\pm 50$ mA              |
| Storage Temperature ( $T_{STG}$ )          | -65°C to +150°C          |
| Junction Temperature ( $T_J$ )             |                          |
| PDIP                                       | 140°C                    |

## Recommended Operating Conditions

|                                                 |                |
|-------------------------------------------------|----------------|
| Supply Voltage ( $V_{CC}$ )                     | 2.0V to 6.0V   |
| Input Voltage ( $V_I$ )                         | 0V to $V_{CC}$ |
| Output Voltage ( $V_O$ )                        | 0V to $V_{CC}$ |
| Operating Temperature ( $T_A$ )                 | -40°C to +85°C |
| Minimum Input Edge Rate ( $\Delta V/\Delta t$ ) | 125 mV/ns      |
| $V_{IN}$ from 30% to 70% of $V_{CC}$            |                |
| $V_{CC}$ @ 3.3V, 4.5V, 5.5V                     |                |

**Note 1:** Absolute maximum ratings are those values beyond which damage to the device may occur. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation of FACT™ circuits outside databook specifications.

## DC Electrical Characteristics

| Symbol                      | Parameter                         | V <sub>CC</sub><br>(V) | T <sub>A</sub> = 25°C |                   | T <sub>A</sub> = -40°C to +85°C | Units | Conditions                                                                                                                                        |   |                                                                                                                                                |
|-----------------------------|-----------------------------------|------------------------|-----------------------|-------------------|---------------------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------------------------------------------------------------------|
|                             |                                   |                        | Typ                   | Guaranteed Limits |                                 |       |                                                                                                                                                   |   |                                                                                                                                                |
| V <sub>IH</sub>             | Minimum HIGH Level Input Voltage  | 3.0                    | 1.5                   | 2.1               | 2.1                             | V     | V <sub>OUT</sub> = 0.1V<br>or V <sub>CC</sub> - 0.1V                                                                                              |   |                                                                                                                                                |
|                             |                                   | 4.5                    | 2.25                  | 3.15              | 3.15                            |       |                                                                                                                                                   |   |                                                                                                                                                |
|                             |                                   | 5.5                    | 2.75                  | 3.85              | 3.85                            |       |                                                                                                                                                   |   |                                                                                                                                                |
| V <sub>IL</sub>             | Maximum LOW Level Input Voltage   | 3.0                    | 1.5                   | 0.9               | 0.9                             | V     | V <sub>OUT</sub> = 0.1V<br>or V <sub>CC</sub> - 0.1V                                                                                              |   |                                                                                                                                                |
|                             |                                   | 4.5                    | 2.25                  | 1.35              | 1.35                            |       |                                                                                                                                                   |   |                                                                                                                                                |
|                             |                                   | 5.5                    | 2.75                  | 1.65              | 1.65                            |       |                                                                                                                                                   |   |                                                                                                                                                |
| V <sub>OH</sub>             | Minimum HIGH Level Output Voltage | 3.0                    | 2.99                  | 2.9               | 2.9                             | V     | I <sub>OUT</sub> = -50 μA                                                                                                                         |   |                                                                                                                                                |
|                             |                                   | 4.5                    | 4.49                  | 4.4               | 4.4                             |       |                                                                                                                                                   |   |                                                                                                                                                |
|                             |                                   | 5.5                    | 5.49                  | 5.4               | 5.4                             |       |                                                                                                                                                   |   |                                                                                                                                                |
|                             |                                   | 3.0                    |                       | 2.56              | 2.46                            | V     | V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>I <sub>OH</sub> = -12 mA<br>I <sub>OH</sub> = -24 mA<br>I <sub>OH</sub> = -24 mA (Note 2) |   |                                                                                                                                                |
|                             |                                   | 4.5                    |                       | 3.86              | 3.76                            |       |                                                                                                                                                   |   |                                                                                                                                                |
|                             |                                   | 5.5                    |                       | 4.86              | 4.76                            |       |                                                                                                                                                   |   |                                                                                                                                                |
|                             |                                   | 3.0                    |                       | 0.36              | 0.44                            |       |                                                                                                                                                   | V | V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>I <sub>OL</sub> = 12 mA<br>I <sub>OL</sub> = 24 mA<br>I <sub>OL</sub> = 24 mA (Note 2) |
|                             |                                   | 4.5                    |                       | 0.36              | 0.44                            |       |                                                                                                                                                   |   |                                                                                                                                                |
|                             |                                   | 5.5                    |                       | 0.36              | 0.44                            |       |                                                                                                                                                   |   |                                                                                                                                                |
| V <sub>OL</sub>             | Maximum LOW Level Output Voltage  | 3.0                    | 0.002                 | 0.1               | 0.1                             | V     | I <sub>OUT</sub> = 50 μA                                                                                                                          |   |                                                                                                                                                |
|                             |                                   | 4.5                    | 0.001                 | 0.1               | 0.1                             |       |                                                                                                                                                   |   |                                                                                                                                                |
|                             |                                   | 5.5                    | 0.001                 | 0.1               | 0.1                             |       |                                                                                                                                                   |   |                                                                                                                                                |
|                             |                                   | 3.0                    |                       | 0.36              | 0.44                            | V     |                                                                                                                                                   |   |                                                                                                                                                |
|                             |                                   | 4.5                    |                       | 0.36              | 0.44                            |       |                                                                                                                                                   |   |                                                                                                                                                |
|                             |                                   | 5.5                    |                       | 0.36              | 0.44                            |       |                                                                                                                                                   |   |                                                                                                                                                |
| I <sub>IN</sub> (Note 4)    | Maximum Input Leakage Current     | 5.5                    |                       | ±0.1              | ±1.0                            | μA    | V <sub>I</sub> = V <sub>CC</sub> , GND                                                                                                            |   |                                                                                                                                                |
| I <sub>OLD</sub>            | Minimum Dynamic                   | 5.5                    |                       |                   | 75                              | mA    | V <sub>OLD</sub> = 1.65V Max                                                                                                                      |   |                                                                                                                                                |
| I <sub>OHD</sub>            | Output Current (Note 3)           | 5.5                    |                       |                   | -75                             | mA    | V <sub>OHD</sub> = 3.85V Min                                                                                                                      |   |                                                                                                                                                |
| I <sub>CC</sub><br>(Note 4) | Maximum Quiescent Supply Current  | 5.5                    |                       | 2.0               | 20.0                            | μA    | V <sub>IN</sub> = V <sub>CC</sub><br>or GND                                                                                                       |   |                                                                                                                                                |

**Note 2:** All outputs loaded; thresholds on input associated with output under test.

**Note 3:** Maximum test duration 20 ms, one output loaded at a time.

**Note 4:**  $I_{IN}$  and  $I_{CC}$  @ 3.0V are guaranteed to be less than or equal to the respective limit @ 5.5V  $V_{CC}$ .

AC Electrical Characteristics

| Symbol           | Parameter         | V <sub>CC</sub><br>(V)<br>(Note 5) | T <sub>A</sub> = +25°C<br>C <sub>L</sub> = 50 pF |     |      | T <sub>A</sub> = -40°C to +85°C<br>C <sub>L</sub> 40 pF |      | Units |
|------------------|-------------------|------------------------------------|--------------------------------------------------|-----|------|---------------------------------------------------------|------|-------|
|                  |                   |                                    | Min                                              | Typ | Max  | Min                                                     | Max  |       |
| t <sub>PHL</sub> | Propagation Delay | 3.3                                | 2.0                                              | 6.0 | 11.5 | 1.5                                                     | 12.5 | ns    |
|                  | Inputs to Outputs | 5.0                                | 1.5                                              | 4.5 | 8.5  | 1.0                                                     | 9.5  |       |
| t <sub>PLH</sub> | Propagation Delay | 3.3                                | 2.0                                              | 6.5 | 11.5 | 1.5                                                     | 12.5 | ns    |
|                  | Inputs to Outputs | 5.0                                | 1.5                                              | 4.5 | 8.5  | 1.0                                                     | 9.0  |       |


Note 5: Voltage Range 3.3V is 3.3V ± 0.3V  
Voltage Range 5.0V is 5.0V ± 0.5V

Capacitance

| Symbol          | Parameter                     | Typ | Units | Conditions             |
|-----------------|-------------------------------|-----|-------|------------------------|
| C <sub>IN</sub> | Input Capacitance             | 4.5 | pF    | V <sub>CC</sub> = OPEN |
| C <sub>PD</sub> | Power Dissipation Capacitance | 35  | pF    | V <sub>CC</sub> = 5.0V |



74AC86

# Physical Dimensions inches (millimeters) unless otherwise noted

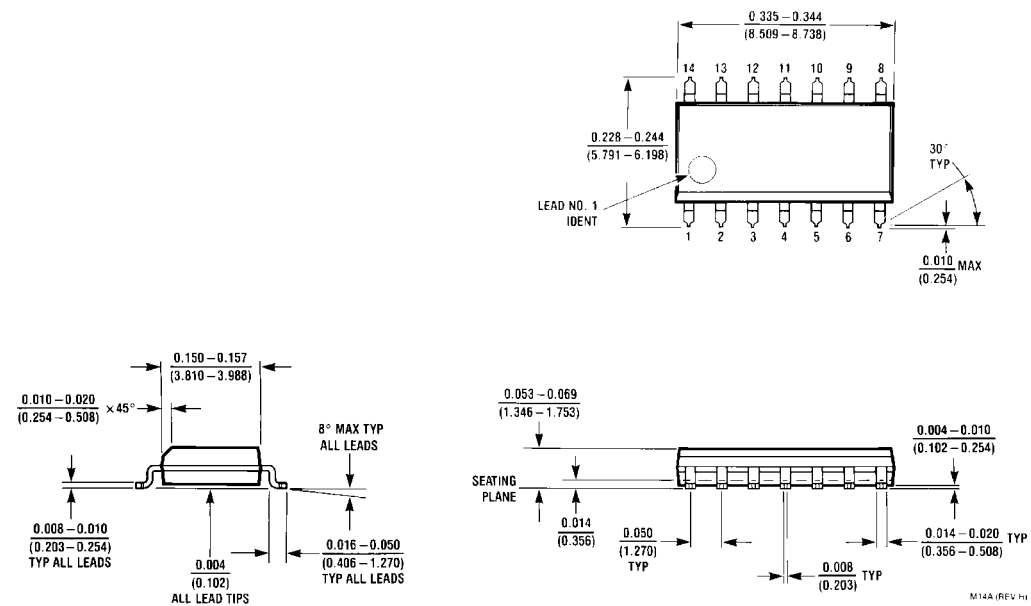

14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150" Narrow Body  
Package Number M14A

**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

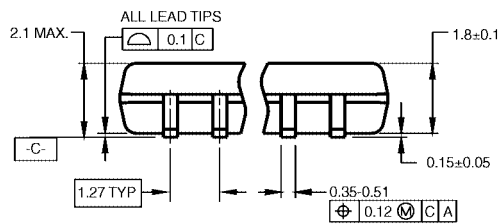
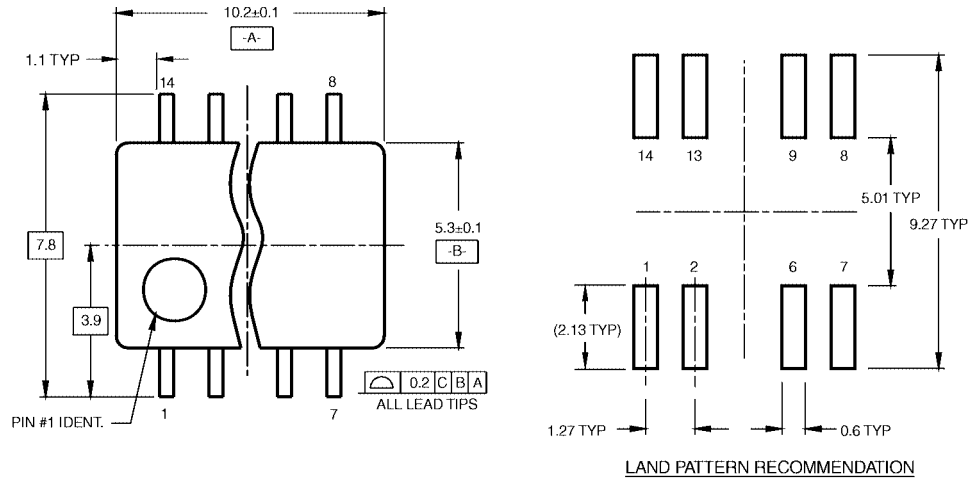


DIMENSIONS ARE IN MILLIMETERS

NOTES:

- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.



M14DRevB1

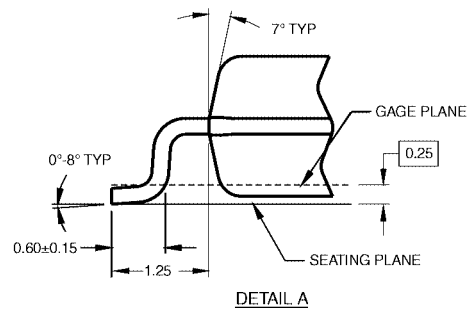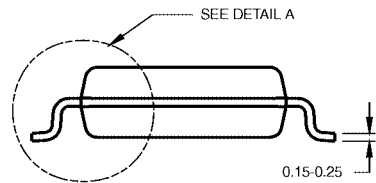




**14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide  
Package Number M14D**

74AC86

# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

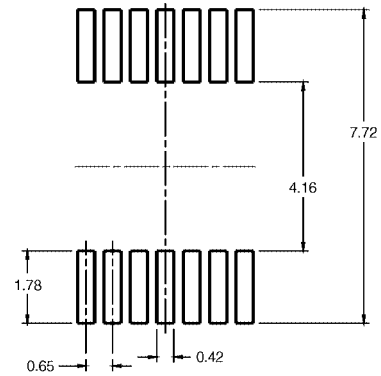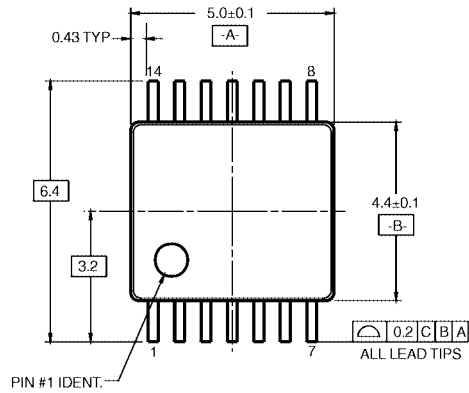

LAND PATTERN RECOMMENDATION

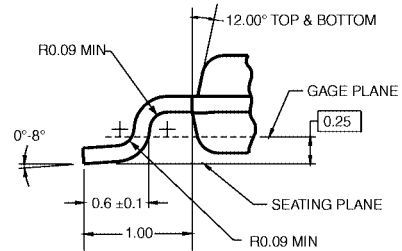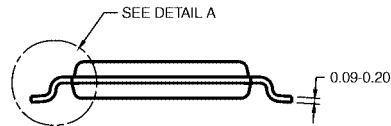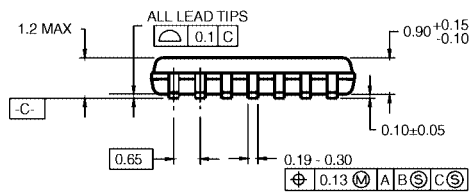

DETAIL A


## NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION AB, REF NOTE 6, DATE 7/93.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.

MTC14RevC3

**14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  
Package Number MTC14**

**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

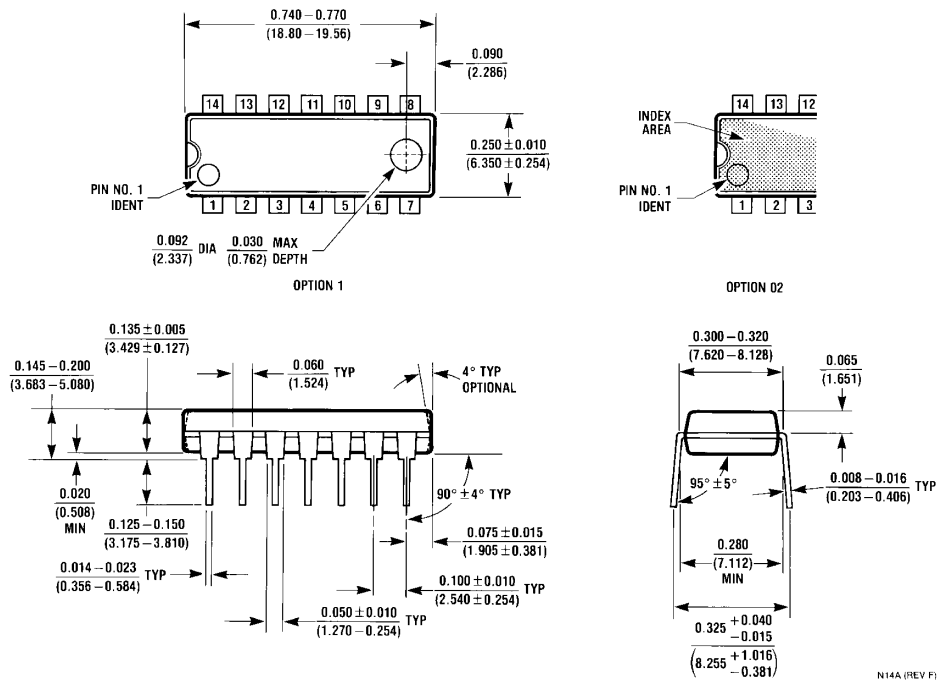

**14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide  
Package Number N14A**

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)