



Target Specification of 1MBI200SA-120

查询"1MBI200SA120"供应商

1. Outline Drawing (Unit : mm)

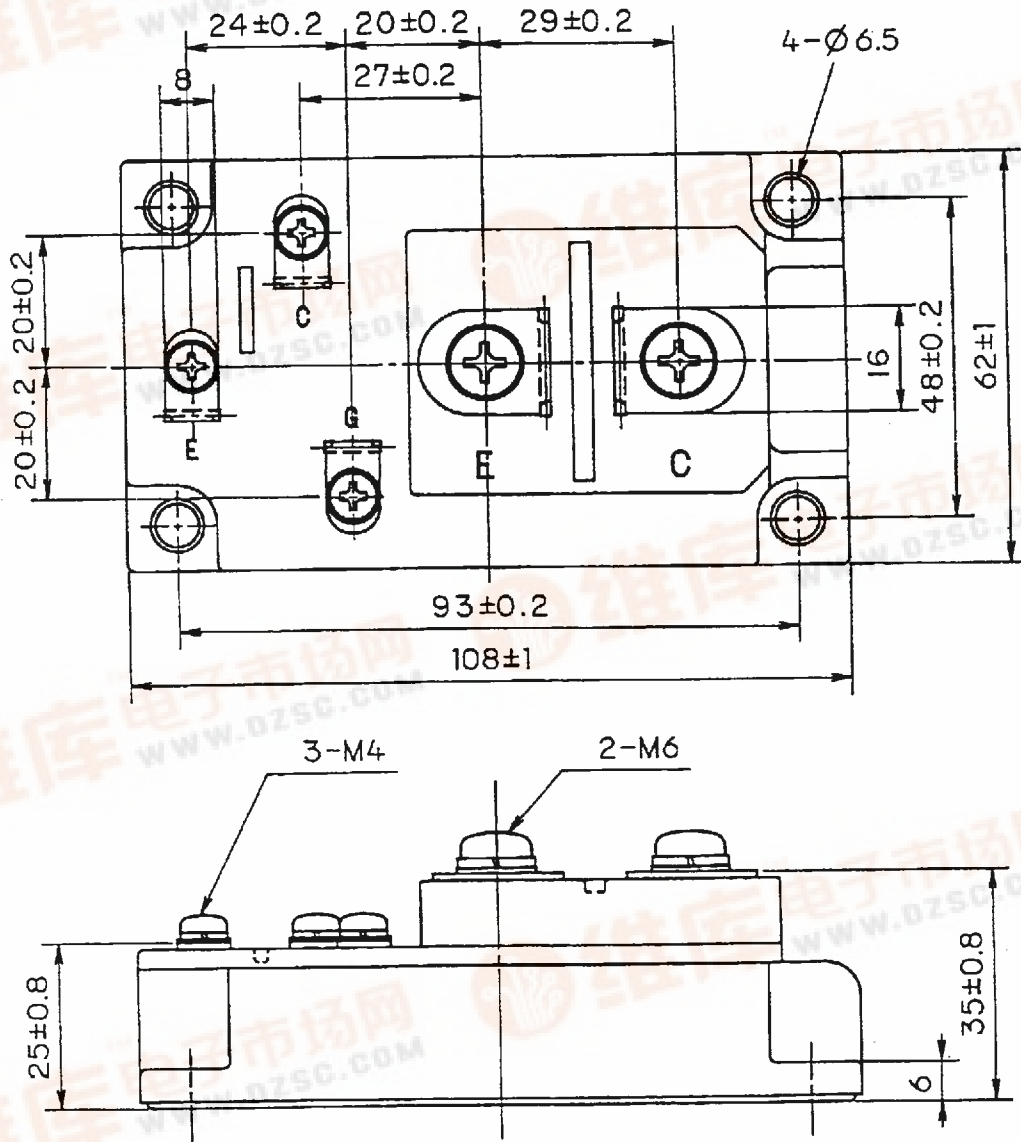

2. Equivalent circuit

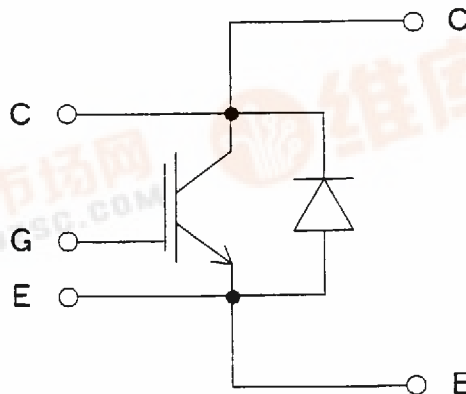

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

DATE	NAME	APPROVED
DRAWN Feb -11 -99	N. Anikawa	
CHECKED Feb -11 -99	S. Murota	T. Miyasaka

Fuji Electric Co.,Ltd.

DWG.NO. MT5F 9777 1/5



3. Absolute Maximum Ratings ( at Tc= 25°C unless otherwise specified )

Items	Symbols	Conditions	Maximum Ratings		Units
Collector-Emitter Voltage	V <sub>CES</sub>		1200		V
Gate-Emitter voltage	V <sub>GES</sub>		±20		V
Collector current	I <sub>c</sub>	Continuous	T <sub>c</sub> =25°C	300	A
			T <sub>c</sub> =80°C	200	
	I <sub>c</sub> pulse	1ms	T <sub>c</sub> =25°C	600	
			T <sub>c</sub> =80°C	400	
	-I <sub>c</sub>			200	
-I <sub>c</sub> pulse	1ms		400		
Collector Power Dissipation	P <sub>c</sub>	1 device	1300		W
Junction temperature	T <sub>j</sub>		150		°C
Storage temperature	T <sub>stg</sub>		-40~ +125		°C
Isolation voltage <sup>(*1)</sup>	V <sub>iso</sub>	AC : 1min.	2500		V
Screw Torque	Mounting <sup>(*2)</sup>		3.5		N·m
	Terminals <sup>(*3)</sup>		4.5		
	Terminals <sup>(*4)</sup>		1.7		

(\*1) All terminals should be connected together when isolation test will be done.

(\*2) Recommendable Value : 2.5~3.5 N·m (M5) or (M6)

(\*3) Recommendable Value : 3.5~4.5 N·m (M6)

(\*4) Recommendable Value : 1.3~1.7 N·m (M4)

4. Electrical characteristics ( at T<sub>j</sub> = 25°C unless otherwise specified )

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	Max.	
Zero gate voltage Collector current	I <sub>CES</sub>	V <sub>GE</sub> = 0 V, V <sub>CE</sub> = 1200 V			4.0	mA
Gate-Emitter leakage current	I <sub>GES</sub>	V <sub>CE</sub> = 0 V, V <sub>GE</sub> = ±20 V			0.8	μA
Gate-Emitter threshold voltage	V <sub>GE(th)</sub>	V <sub>CE</sub> = 20 V, I <sub>c</sub> = 200 mA	5.5	7.2	8.5	V
Collector-Emitter saturation voltage	V <sub>CE(sat)</sub>	V <sub>GE</sub> = 15 V, T <sub>j</sub> = 25 °C		2.3	2.6	V
		I <sub>c</sub> = 200 A, T <sub>j</sub> = 125 °C		2.8		
Input capacitance	C <sub>ies</sub>	V <sub>GE</sub> = 0 V		24000		pF
Output capacitance	C <sub>oes</sub>	V <sub>CE</sub> = 10 V		5000		
Reverse transfer capacitance	C <sub>res</sub>	f = 1 MHz		4400		
Turn-on time	t <sub>on</sub>	V <sub>cc</sub> = 600 V			1.2	μs
	t <sub>r</sub>	I <sub>c</sub> = 200 A			0.6	
	t <sub>r(t)</sub>	V <sub>GE</sub> = ±15 V		0.1		
Turn-off time	t <sub>off</sub>	R <sub>G</sub> = 4.7 Ω			1.0	μs
	t <sub>f</sub>			0.08	0.3	
Forward on voltage	V <sub>F</sub>	I <sub>F</sub> = 200 A	T <sub>j</sub> = 25 °C	2.4	3.3	V
			T <sub>j</sub> = 125 °C	2.0		
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> = 200 A			0.35	μs

5. Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	Max.	
Thermal resistance (1 device)	R <sub>th(j-c)</sub>	IGBT			0.096	°C/W
		FWD			0.260	
Contact Thermal resistance	R <sub>th(c-f)</sub>	with Thermal Compound <sup>(*)</sup>		0.0125		







\* This is the value which is defined mounting on the additional cooling fin with thermal compound.

Note :

- This specification is only for technical considerations, and not for contract.
- This specification is subject to be changed without notices.

This material and the information herein is the property of Fuji Electric Co Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

查询"1MB1200SA120"供应商

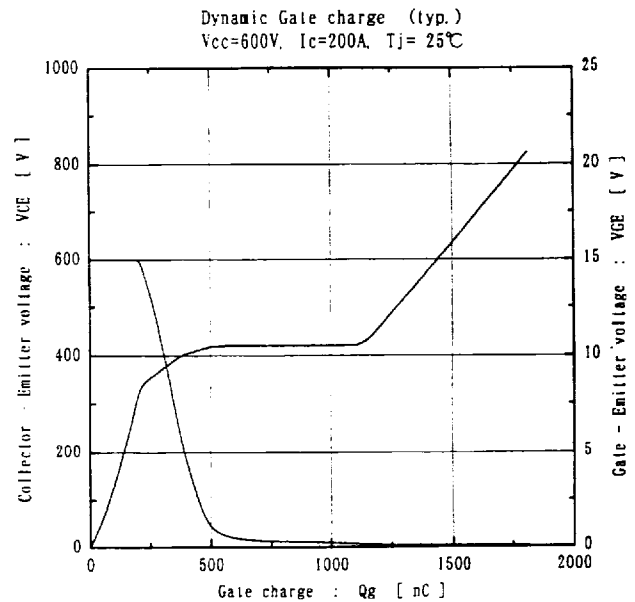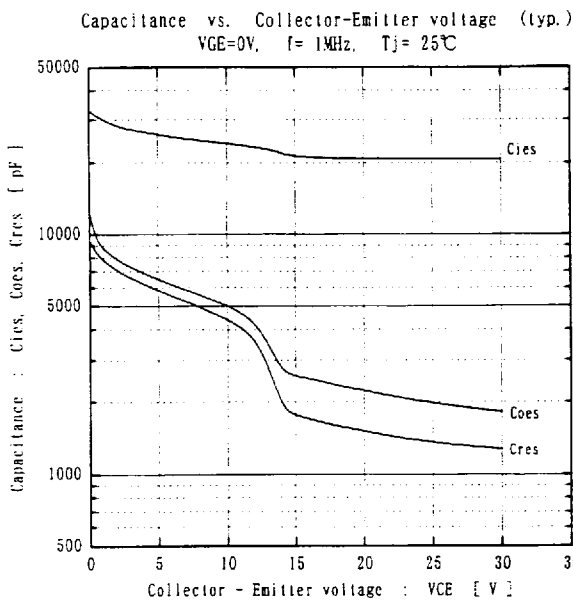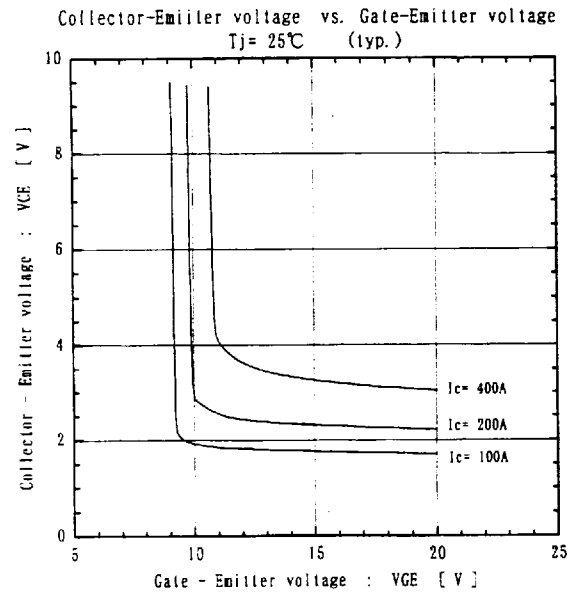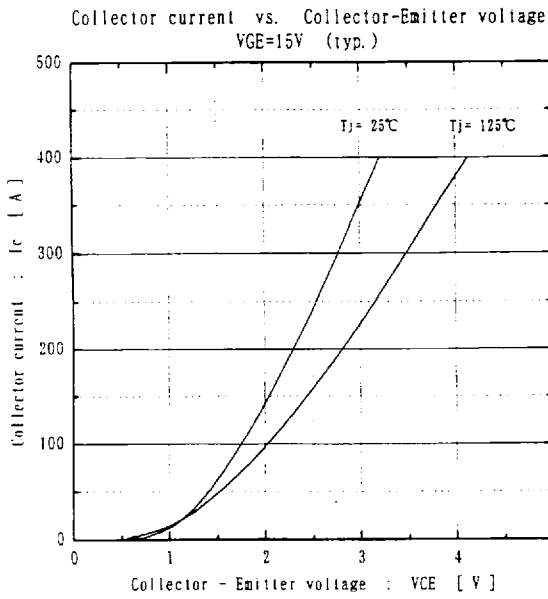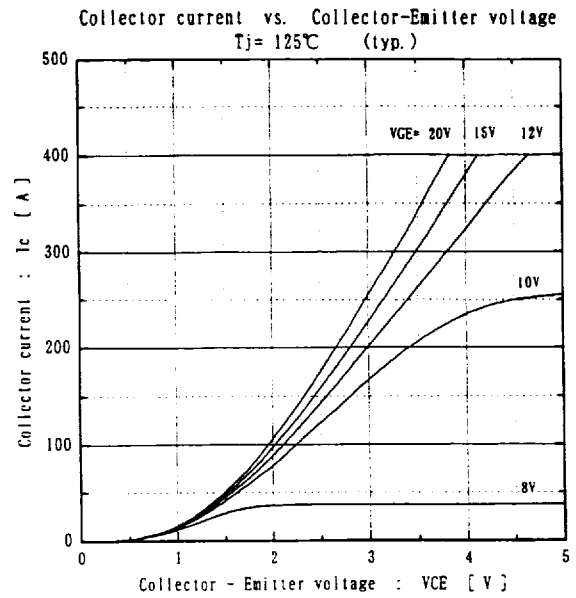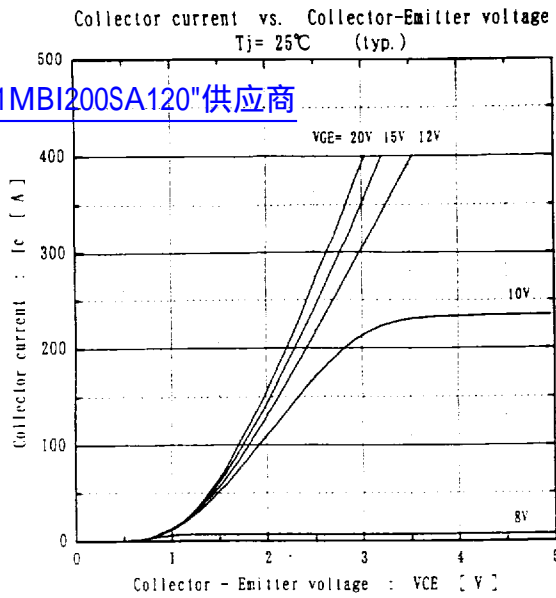

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

REVISIONS







Fuji Electric Co., Ltd.

DWG. NO.

MT5F 9777




3/5

查询"1MB1200SA120"供应商

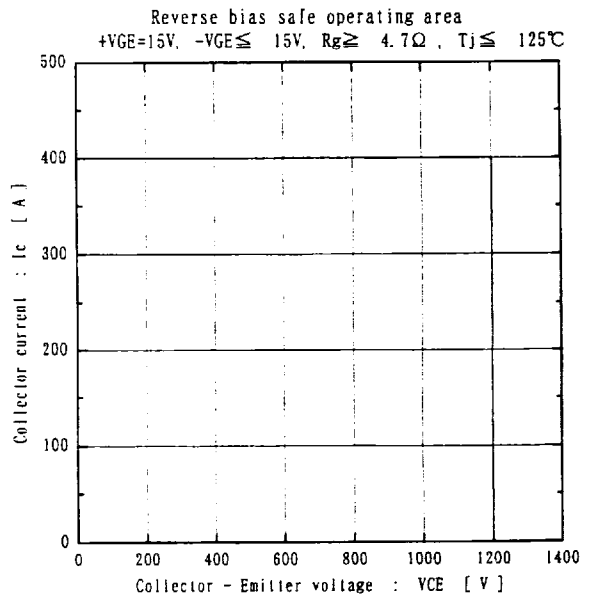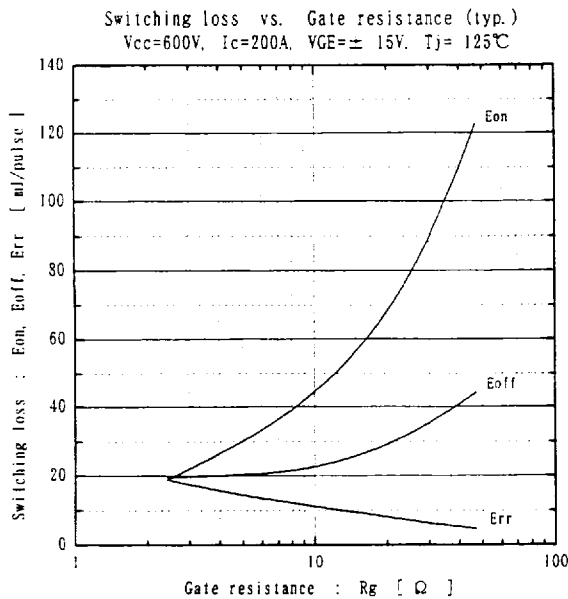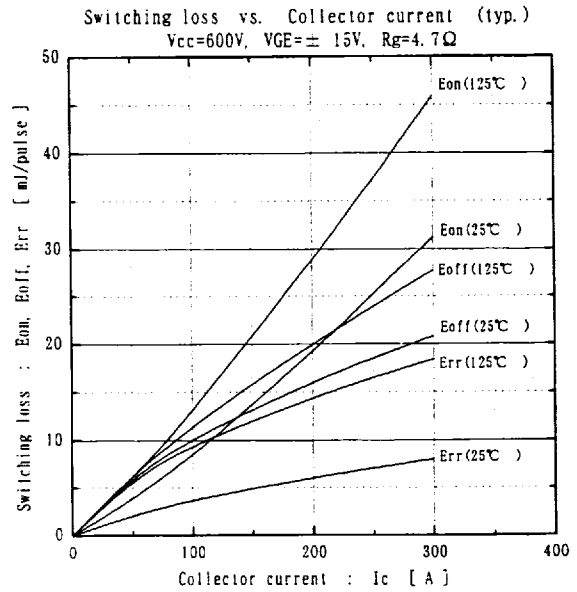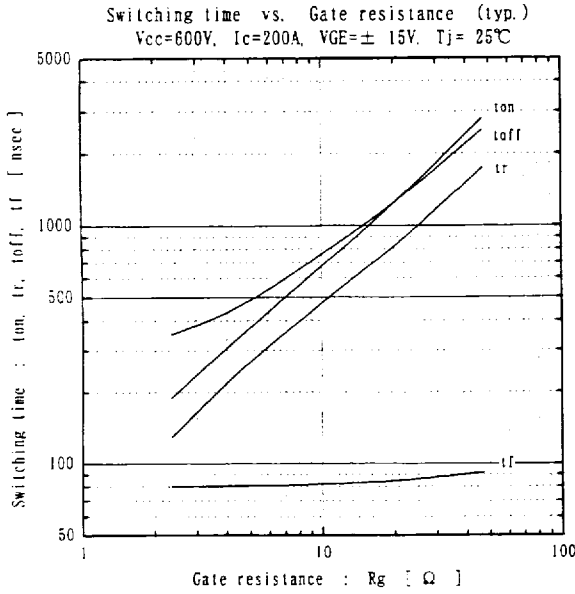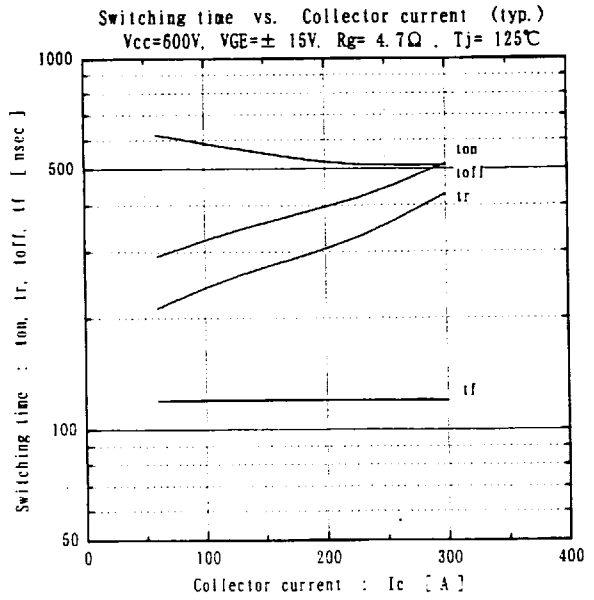
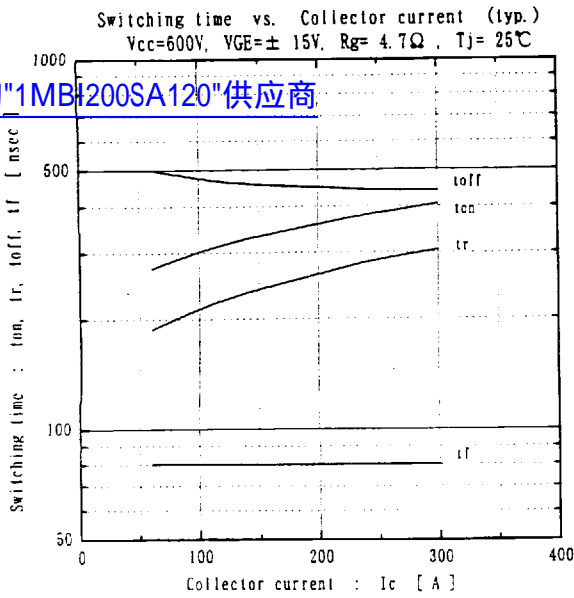


This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

查询"1MB1200SA120"供应商

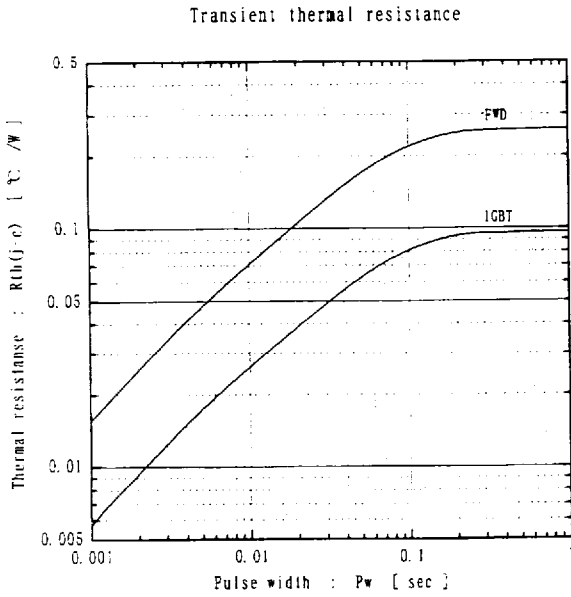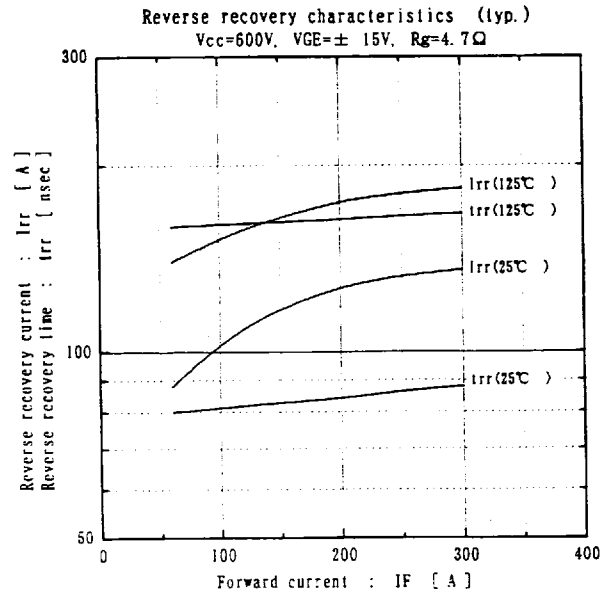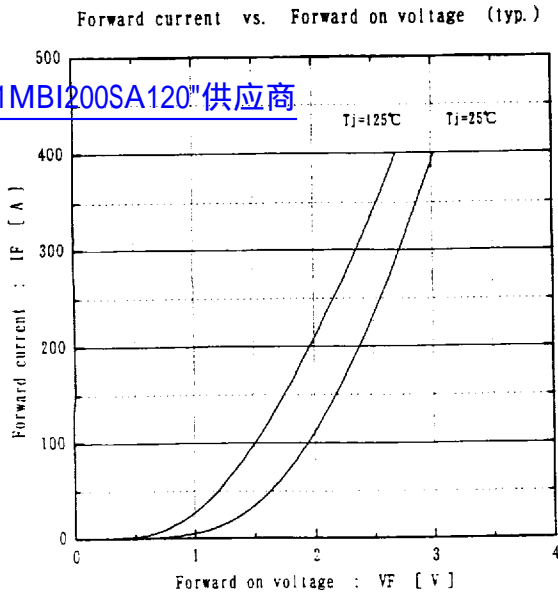

Definitions of switching time

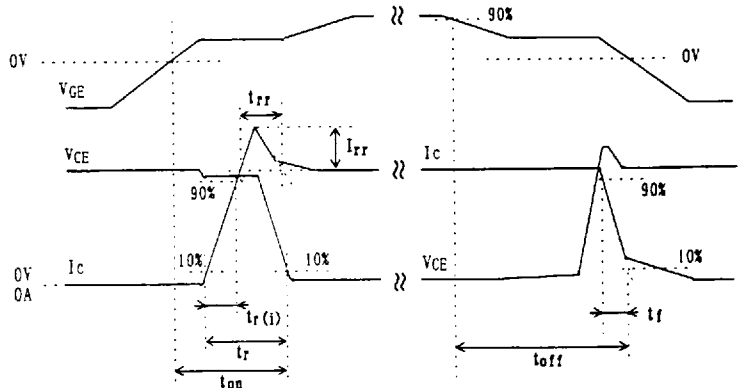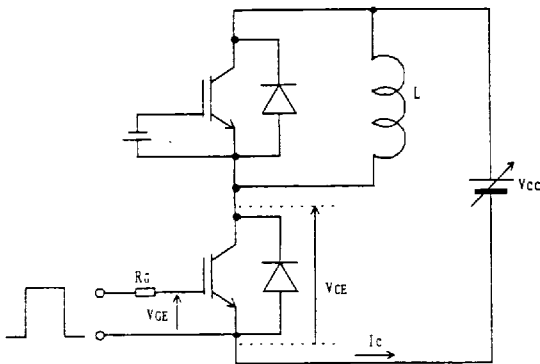

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

REVISIONS