


AD Series Auto Insertable DIP Switch

311 510

查询"0-1437586-2"供应商

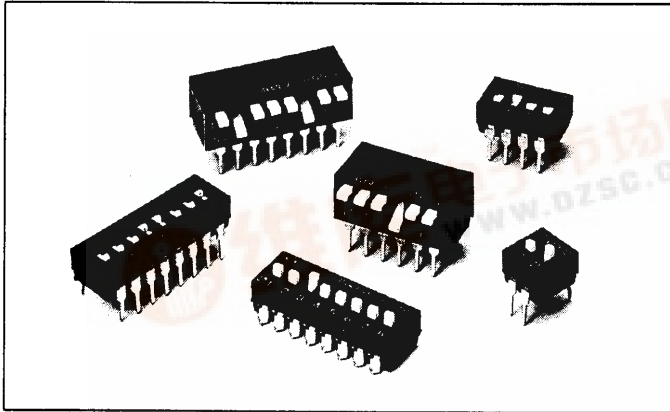

FEATURES:

- Unique high pressure (280,000 PSI) gas contact system provides process compatibility without cumbersome tape seal
- Auto-insertable - available in P.C. and SMD versions

MATERIAL SPECIFICATIONS:

Contacts/Terminals Solder coated brass
 Base Material PBT 94V-0 except ADE/F SMT:
 Cover Material PBT 94 V-0 except ADE/F SMT: PPS
 Actuator Material PBT 94 V-0 except ADE/F SMT: PA6T

PERFORMANCE SPECIFICATIONS:

Contact Rating 0.4VA at 20 VDC max.
 Life Expectancy 1000 Cycles
 Operating Temperature -30°C to +85°C




Fig. 1




Fig. 2




Fig. 3




Fig. 4

PART NUMBERS/STANDARD CONFIGURATIONS:

| Part Number | Positions | Description | Fig | Lead Spacing | Dim A | Dim B | Dim C | Dim D | Dim E |
|-------------|-----------|--|-----|--------------|---------------|----------------|--------------|-------|--------------|
| ADE02 | 2 | Extended Actuator - PC Term. | 1 | 2,54 .100 | 8,48 .334 | 7,06 .278 | 0,99 .039 | — | 4,25 .167 |
| ADE04 | 4 | Extended Actuator - PC Term. | 1 | 2,54 .100 | 8,48 .334 | 12,14 .478 | 0,99 .039 | — | 4,25 .167 |
| ADE06 | 6 | Extended Actuator - PC Term. | 1 | 2,54 .100 | 8,48 .334 | 17,22 .678 | 0,99 .039 | — | 4,25 .167 |
| ADE08 | 8 | Extended Actuator - PC Term. | 1 | 2,54 .100 | 8,48 .334 | 22,30 .878 | 0,99 .039 | — | 4,25 .167 |
| ADE10 | 10 | Extended Actuator - PC Term. | 1 | 2,54 .100 | 8,48 .334 | 27,38 1.078 | 0,99 .039 | — | 4,25 .167 |
| ADF02 | 2 | Flush Actuator - PC Term. | 3 | 2,54 .100 | 7,5 .295 | 7,06 .278 | — | — | 4,25 .167 |
| ADF04 | 4 | Flush Actuator - PC Term. | 3 | 2,54 .100 | 7,5 .295 | 12,14 .478 | — | — | 4,25 .167 |
| ADF06 | 6 | Flush Actuator - PC Term. | 3 | 2,54 .100 | 7,5 .295 | 17,22 .678 | — | — | 4,25 .167 |
| ADF08 | 8 | Flush Actuator - PC Term. | 3 | 2,54 .100 | 7,5 .295 | 22,30 .878 | — | — | 4,25 .167 |
| ADF08S | 8 | Flush Actuator - S Term. Surface Mount | 4 | 2,54 .100 | 4,44 .175 | 22,30 .878 | — | — | 4,25 .167 |
| ADF04S | 4 | Flush Actuator - S Term. Surface Mount | 4 | 2,54 .100 | 4,44 .175 | 12,14 .478 | — | — | 4,25 .167 |
| ADP02 | 2 | Piano Actuator - PC Term. | 2 | 2,54 .100 | 10,01 .394 | 7,06 .278 | 2,11 .083 | — | 6,76 .266 |
| ADP04 | 4 | Piano Actuator - PC Term. | 2 | 2,54 .100 | 10,01 .394 | 12,14 .478 | 2,11 .083 | — | 6,76 .266 |
| ADP06 | 6 | Piano Actuator - PC Term. | 2 | 2,54 .100 | 10,01 .394 | 17,22 .678 | 2,11 .083 | — | 6,76 .266 |
| ADP08 | 8 | Piano Actuator - PC Term. | 2 | 2,54 .100 | 10,01 .394 | 22,30 .878 | 2,11 .083 | — | 6,76 .266 |

AUGAT® Alcoswitch®

Quality and Innovation



Don't see the product you need?
 Request a full line catalog from your
 Augat sales office listed on the back cover